

## Special Accessories

Surcharge for Partitioning in Two Heating Zones (Connection cables are led out on the left and right sides)	<b>Art.-No.</b> <b>5229</b>
Surcharge for Extension Silicone Cable per r.m.	<b>5228</b>
Replacement Halogen Infrared Tube 500 W with protection tube made of quartz glass	<b>V-4415</b>
Replacement Halogen Tube 300 W with protection tube made of quartz glass	<b>V-1286</b>

## Built-In Switch

<b>Built-In Switch Panel, single</b> ON/Off switch with stainless steel built-in panel and rear cover. Switch illuminated. Load capacity max. 230V/15A AC1.	<b>Art.-No.</b> <b>3664</b>
<b>Built-In Switch Panel, fourfold</b> On/Off switch with stainless steel casing. Switches illuminated. Load capacity max. 230V/15A AC1. Switch must be wired on site. Dimensions cover: width 193 mm, height 82 mm Dimensions casing: width 170 mm, height 50 mm, depth 85 mm, cable output to the rear.	<b>3666</b>

## Dimmer

<b>Built-In Dimmer</b> Dimmer for the power control of heat radiators. Built-in device for commercial installations. Power: 230 V / 1000-1800 Watt	<b>Art.-No.</b> <b>3669</b>
Dimensions cover: width 193 mm, height 82 mm Dimensions casing: width 174 mm, height 73 mm, depth 172 mm, cable output to the rear	
Power supply connection: L/N via 6.3 mm accessory shoes PE via screwed connection 1.5 mm <sup>2</sup> Consumer connection: 3-pin, screwed connection 1.5 mm <sup>2</sup> Not suitable for inductive loads. Connection and operation must be performed by a qualified electrician in accordance with EN 60204-1 (VDE 0113) and VBG 4.	



# Cup Warmer for the Transfer Area


Make the work flow perfect in your coffee shop!

**Load from behind, unload from the front.  
Low labour costs because of short distances!**



On the back side the filled wash rack can be pushed directly from the dish washer into the cup warmer.

The racks and cups are not included in the scope of delivery. The feet are available as accessory.

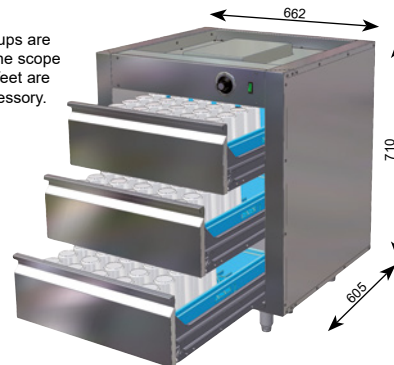

On the front side the warm cups can then be easily removed from the drawers.


## Design

The circulating air hot cupboard is manufactured as a built-in module, so that it can be integrated into counter installations and wall units.  
The filled dishwasher racks (500 mm x 500 mm) can be pushed into the device on the back side, the cups can be easily removed from the drawers on the front side. The special circulating air heating with high performance and robust circulating fan ensure a constant and fast heat distribution.  
Double-leaf design with internal insulation. The inner and outer surfaces are made of stainless steel, material 1.4031. The three or four drawers are fitted out with stainless steel telescopic base units (with a 50 kg loading capacity). The racks (500 mm x 500 mm) from the dishwasher can be placed directly into the bottomless drawers.  
On the back side equipped with wing doors and guiding rails.  
Body dimensions:  
width 665 mm,  
depth 605 mm, + wing doors 40 mm,  
height 710 mm  
Effective depth of drawers: 3 x 170 mm  
Electrical connection: 230V/50Hz/1300W  
Temperature range: approx. 30°C to 80°C

**Art.-No.**  
**2392**

## Special Accessories

<b>Art.-No.</b> <b>9128</b>	<b>Stainless steel feet</b> (Height: 100 mm – approx. 140 mm)
--------------------------------	--

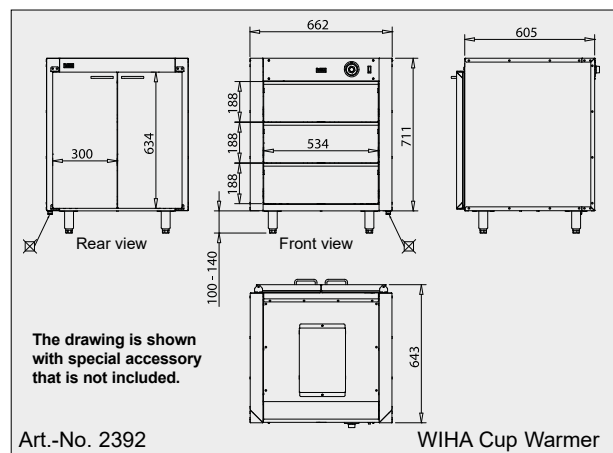

Art.-No. 2392

WIHA Cup Warmer