KUB 710 EN – Euro-Norm Grid, 710 mm High

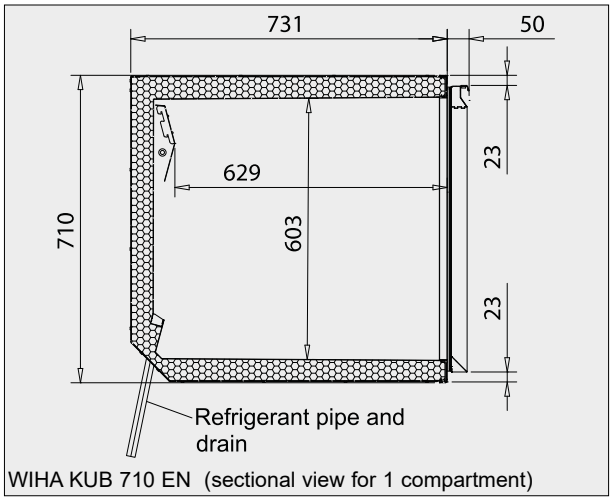

WIHA KUB 710 EN (sectional view for 1 compartment)

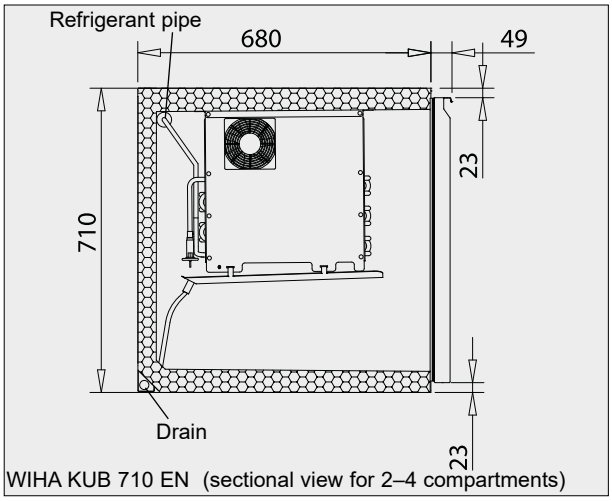

WIHA KUB 710 EN (sectional view for 2–4 compartments)

Design see page 273.

For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 9249 (*)	555 mm	**Art.-No. 20930 (*)**	705 mm	**Art.-No. 9253 (*)**	 905 mm
Art.-No. 9248 (*)	555 mm	**Art.-No. 20931 (*)**	705 mm	**Art.-No. 9252 (*)**	 905 mm

Height: 710 mm, depth: 730 mm + 49 mm

(*) Please note the body depth of 730 mm.

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 290W/-10°ET	Recommended cooling power: 290W/-10°ET	Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W
 1110 mm **Art.-No. 9002**	 1260 mm **Art.-No. 20932**	 1460 mm **Art.-No. 9107**
 1110 mm **Art.-No. 9003**	 1260 mm **Art.-No. 20933**	 1460 mm **Art.-No. 9108**

Height: 710 mm, depth: 680 mm + 49 mm

10. Under Counter Refrigerators

KUB 710 EN

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
 **Art.-No.** **9006**	 **Art.-No.** **20934**	 **Art.-No.** **9103**
 **Art.-No.** **9007**	 **Art.-No.** **20935**	 **Art.-No.** **9104**

Height: 710 mm, depth: 680 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec. connection: 230V/50Hz/380W
 **Art.-No.** **9339**	 **Art.-No.** **20936**	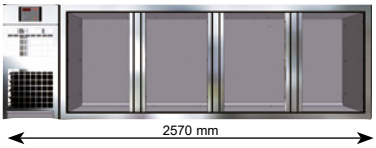 **Art.-No.** **9343**
 **Art.-No.** **9338**	 **Art.-No.** **20937**	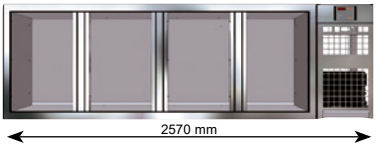 **Art.-No.** **9342**

Height: 710 mm, depth: 680 mm + 49 mm

Errors and technical modification excepted. All prices are in Euro exclusive the statutory VAT. (status 05/2020)

Inserts KUB 710 EN

Wing Door DIN Left with 1 supporting grid effective height 595 mm **Art.-No.** **9211**	
Wing Door DIN Right with 1 supporting grid effective height 595 mm **Art.-No.** **9212**	
Wing Door DIN Left with 5 pairs of bearing rails for EN trays **Art.-No.** **9115**	
Wing Door DIN Right with 5 pairs of bearing rails for EN trays **Art.-No.** **9116**	

Wing Door DIN Left, Glass with 1 supporting grid effective height 595 mm **Art.-No.** **9432**	
Wing Door DIN Right, Glass with 1 supporting grid effective height 595 mm **Art.-No.** **9433**	
Wing Door DIN Left, Glass with 5 pairs of bearing rails **Art.-No.** **9434**	
Wing Door DIN Right, Glass with 5 pairs of bearing rails **Art.-No.** **9435**	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 177 mm top, 347 mm bottom **Art.-No.** **9008**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 357 mm top, 177 mm bottom **Art.-No.** **9010**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 267 mm top, 260 mm bottom **Art.-No.** **9009**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effec. height 180 mm / 150 mm / 135 mm **Art.-No.** **9011**	

Effective area of the drawers for KUB – EN

Effective height [mm]	Effective area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	**Number of bottles**	**GN container**
347	W 382 mm D 510 mm	PET 1,5 l PET 1,0 l Wine 0,7 l	94 x 337 81 x 299 78 x 311	20 24 30	3x GN 1/3-150 6x GN 1/6-150
257	W 382 mm D 510 mm	Water 0,25 l Beer 0,33 l PET 0,5 l	58 x 216 61 x 234 65 x 233	56 48 42	3x GN 1/3-150 6x GN 1/6-150
177	W 382 mm D 510 mm				3x GN 1/3-100 6x GN 1/6-100
147	W 382 mm D 510 mm				3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling foodstuffs in the bakery sector.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Note:
A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.
The price of the second evaporator is not included in the price and must be added.

Special Accessories

	Art.-No.
Surcharge expansion valve for R452A instead R134a / R513A	**9117**
EN divider bar for pullout partitioning to accommodate bottles, lockable plastic model	**9119**
EN divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	**9140**
GN bearing rail for EN pullout	**9058**
Extra EN grid with 2 bottom beams	**9121**
EN intermediate section behind central bar (small grid for the space between 2 compartments)	**9192**
Extra pair bearing rails for EN wing door compartment	**9052**
Base rail, 40 mm high, per r.m. body length	**9133**
4 round feet, adjustable height approx. 100–140 mm (for 1–2 compartments)	**9128**
5 round feet, adjustable height approx. 100–140 mm (for 3–4 compartments)	**9131**
Base retaining bracket for round feet, apiece	**9152**
Solenoid valve mounted behind the panel	**9122**
Drill hole 40 mm in body panel	**9137**
Refrigerant pipes on the back side centred out of the body	**9139**
Lock for door or drawer	**9157**

	Art.-No.
TMP 610 controller for standard cooling	**12205**
Second evaporator for external cooling systems	**8099**
Second evaporator for ready-to-use refrigerators The cooling unit is equipped with a refrigerant receiver, the evaporators with expansion valves.	**8095**
LED lighting 12V/8W (height of compartment 710)	**9444**
For the operation of the LED lighting a transformer 230V/12V with rectifier is required. Transformer with rectifier 12V/20W	**2452**

Mounting Covers

Width 150 mm, height 710 mm

	Art.-No.
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	**21110**
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	**21111**
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	**21112**
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	**21113**