KUB 810 – for Beverages, 810 mm High

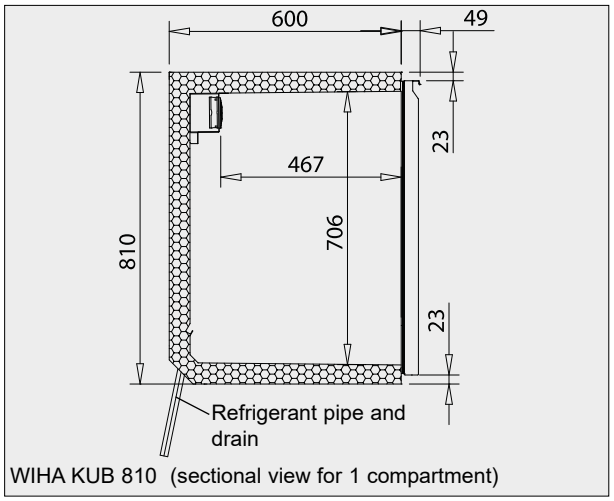

WIHA KUB 810 (sectional view for 1 compartment)

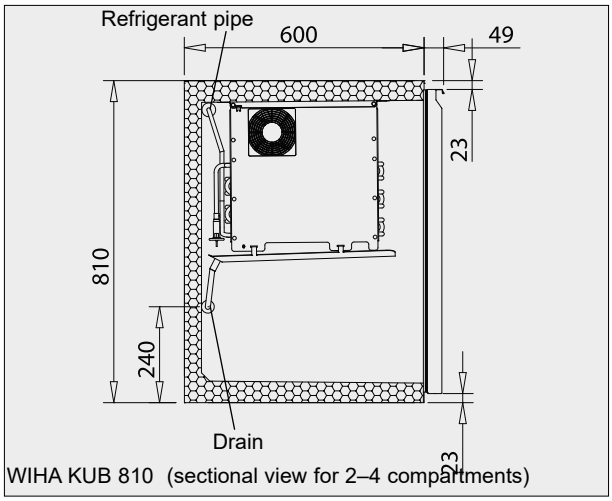

WIHA KUB 810 (sectional view for 2–4 compartments)

Design see page 273.

For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 10521 (*)	550 mm	**Art.-No. 20940 (*)**	700 mm	**Art.-No. 10571 (*)**	900 mm
Art.-No. 10531 (*)	550 mm	**Art.-No. 20941 (*)**	700 mm	**Art.-No. 10581 (*)**	 900 mm

Height: 810 mm, depth: 600 mm + 49 mm

(*) The pullout 10194 cannot be inserted in this model.

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 290W/-10°ET	Recommended cooling power: 290W/-10°ET	Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W
 1100 mm **Art.-No. 10522**	 1250 mm **Art.-No. 20942**	 1450 mm **Art.-No. 10572**
 1100 mm **Art.-No. 10532**	 1250 mm **Art.-No. 20943**	 1450 mm **Art.-No. 10582**

Height: 810 mm, depth: 600 mm + 49 mm

Errors and technical modification excepted. All prices are in Euro exclusive the statutory VAT. (status 05/2020)

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
		
Art.-No. **10523**	**Art.-No.** **20944**	**Art.-No.** **10573**
		
Art.-No. **10533**	**Art.-No.** **20945**	**Art.-No.** **10583**

Height: 810 mm, depth: 600 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec connection: 230V/50Hz/380W
		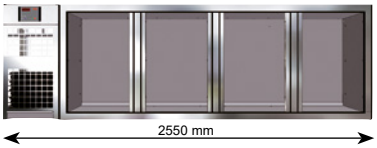
Art.-No. **10524**	**Art.-No.** **20946**	**Art.-No.** **10574**
		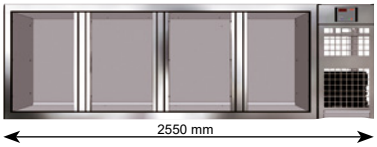
Art.-No. **10534**	**Art.-No.** **20947**	**Art.-No.** **10584**

Height: 810 mm, depth: 600 mm + 49 mm

Inserts KUB 810

Wing Door DIN Left with 1 supporting grid effective height 700 mm **Art.-No.** **10182**	
Wing Door DIN Right with 1 supporting grid effective height 700 mm **Art.-No.** **10183**	
Wing Door DIN Left with barrel rail for 30 l barrel effective height 695 mm **Art.-No.** **10184**	
Wing Door DIN Right with barrel rail for 30 l barrel effective height 695 mm **Art.-No.** **10185**	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 312 mm top, 305 mm bottom **Art.-No.** **10198**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 270 mm top, 350 mm bottom **Art.-No.** **10188**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 350 mm top, 260 mm bottom **Art.-No.** **10189**	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effec. height 180 mm / 195 mm / 175 mm **Art.-No.** **10194 (*)**	

(*) The stainless steel roller drawer no. 10194 cannot be inserted in a body with only one compartment!

Wing Door DIN Left, Glass with grid effective height 700 mm **Art.-No.** **9436**	
Wing Door DIN Right, Glass with grid effective height 700 mm **Art.-No.** **9437**	

Effective area of the drawers for KUB 810

Effective height [mm]	Effective area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
350	W 376 mm D 510 mm	PET 1,5 l PET 1,0 l Glass 0,75 l Glass 0,33 l	94 x 337 81 x 303 80 x 321 61 x 234	20 30 30 42	3x GN 1/3-150 6x GN 1/6-150
315	W 376 mm D 510 mm	PET 1,0 l Glass 0,33 l Glass 0,25 l	81 x 303 61 x 234 58 x 216	30 42 56	3x GN 1/3-100 6x GN 1/6-100
270	W 376 mm D 510 mm	Glass 0,33 l Glass 0,25 l	61 x 234 58 x 216	42 56	3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling beverage bottles and beer barrels with a height of 695 mm.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Note:
A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.
The price of the second evaporator is not included in the price and must be added.

Special Accessories

	Art.-No.
Surcharge expansion valve for R452A instead R134a / R513A	**9117**
Divider bar for pullout partitioning to accommodate bottles, lockable plastic model	**8882**
Divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	**8883**
GN bearing rail	**8886**
Extra grid with 2 bottom beams	**8885**
GN intermediate section behind central bar (small grid for the space between 2 compartments)	**9191**
GN grid, side limit left	**6620**
GN grid, side limit right	**6621**
Base rail, 40 mm high, per r.m. body length	**9133**
Solenoid valve mounted behind the panel	**9122**
Drill hole 35 mm in body panel	**21140**
Drill hole 45 mm in body panel	**21141**
Drill hole 65 mm in body panel	**21142**
Drill hole 76 mm in body panel	**21144**
Drill hole 86 mm in body panel	**21145**
Refrigerant pipes on the back side centred out of the body	**9139**
Lock for door or drawer	**9157**
TMP 610 controller for standard cooling	**12205**
Second evaporator for external cooling systems	**8099**
Second evaporator for ready-to-use refrigerators The cooling unit is equipped with a refrigerant receiver, the evaporators with expansion valves.	**8095**

	Art.-No.
LED lighting 12V/8W (height of compartment 810)	**9444**
For the operation of the LED lighting a transformer 230V/12V with rectifier is required. Transformer with rectifier 12V/20W	**2452**

Mounting Covers

Width 150 mm, height 810 mm

	Art.-No.
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	**21120**
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	**21121**
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	**21122**
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	**21123**

Errors and technical modification excepted. All prices are in Euro exclusive the statutory VAT. (status 05/2020)

Under Counter Module for Sinks – 810 mm High

Made entirely of stainless steel

Under Counter Module for Sinks

Design

The 810 mm high under counter module for sinks is made entirely of stainless steel, material 1.4016. The exterior surface of the front side is ground. The module is equipped with wing doors on the front side.
On the back side and lateral with cut-outs for the installation of water pipes and waste water pipes. The bottom area of the module for sinks is open in order to make „base installation“ possible.
If required, a bottom plate made of stainless steel is available as accessory and can be inserted on site.
The under counter module for sinks can be attached to the "Under Counter Refrigerators KUB" equipped with two or more compartments.

	Art.-No.
With ready mounted controller for external cooling unit:	
Width 450 mm (for single sink), wing door with hinge left	**10600-940**
Width 450 mm (for single sink), wing door with hinge right	**10600-941**
Width 800 mm (for double sink)	**10601-940**
Without controller, without cooling unit:	
Width 450 mm (for single sink), wing door with hinge left	**10600-960**
Width 450 mm (for single sink), wing door with hinge right	**10600-961**
Width 800 mm (for double sink)	**10601-960**
Bottom plate, stainless steel for 10600-940 and 10600-941	**10600-050**
Bottom plate, stainless steel for 10601-940	**10601-050**
(Two bottom plates can be inserted in the 800 mm wide under counter module for sinks)	
Waste dumper instead of wing door, for module width=800 mm, mounted left	**10604**
Waste dumper instead of wing door, for module width=800 mm, mounted right	**10605**
Waste dumper instead of wing door, for module width=450 mm	**10606**

Art.-No. 10600-940

Art.-No. 10601-940

End Plate for Under Counter Modules for Sinks and Under Counter Modules

If the side areas of the under counter modules are visible, an end plate is necessary.
The end plate is made of stainless steel, material 1.4016 with ground surface.
The end plate is equipped with a lining made of wood composite, so that the end plate can be mounted easily with wood screws from the inside of the under counter module.
Dimensions: Height 810 mm, depth 600 mm, thickness 20 mm

	Art.-No.
End plate height=810 mm	**9136**

Base Rails

	Art.-No.
Base rail, 40 mm high, price per r.m. body length, fully mounted	**9133**
Base rail, 50 mm high, price per r.m. body length, fully mounted	**9134**