

Module – Cup Warmer

Height 810 mm

Reliable technology for the commercial operation

- Even heat distribution by circulating air heating
- Great heat output (1200 W)
- Stainless steel telescopic pull-outs
- Service friendly
- For dishwasher racks 500 mm x 500 mm

Cup Warmer, Height: 810 mm

This cup warmer and the under counter refrigerators from the "KUB 810" series and the under counter modules (height 810 mm) can be mounted together on base rails (height 40 or 50 mm) to form a block (see chapter 10: KUB 810 and the under counter modules 810 mm). The base rail is to be added separately per running meter of body length.

The cup warmer and the under counter modules are designed so that the lower base plate can be removed and this space is available for the installation of supply lines.

If the lateral sides are visible, they must be closed with an on-site decorative plate or with an end plate made of stainless steel (available as accessory).

3 Drawers for dishwasher racks
500 mm x 500 mm

4 Drawers for dishwasher racks
500 mm x 500 mm

Art.-No.

13710

13711

Special Accessories

Perforated shelf for a use without
dishwasher racks

(The effective height of the drawer is reduced by approx. 15 mm.)

Art.-No.

13719

End plate, stainless steel
height=810 mm, depth=600 mm, thickness=20 mm

9136

Base rail 40 mm high,
price per r.m. body length, fully mounted

9133

Base rail 50 mm high,
price per r.m. body length, fully mounted

9134



Design

The circulating air hot cupboard is manufactured as a built-in module, so that it can be integrated into counter installations and wall units.

The special circulating air heating with high performance and robust circulating fan ensure a constant and fast heat distribution. The body of the cupboard is made entirely of stainless steel, material 1.4016. The insulation is mounted on the exterior and is exposed.

The three or four drawers are fitted out with stainless steel telescopic base units (load capacity 25 kg).

The racks (500 mm x 500 mm) from the dishwasher can be placed directly into the bottomless drawers. By default, the connecting cable is guided to the base area.

Dimensions: width 600 mm, height 810 mm, depth body 600 mm, cover panels protruding


Effective depth drawers: Art.-No. 13710: 195/210/175 mm
Art.-No. 13711: 125/135/135/175 mm

Electrical connection: 230V/50Hz/1300W

Temperature range: approx. 30 °C to 80 °C



The 810 mm high cup warmer can be combined easily with the under counter modules (see page 305) or the under counter refrigerators of the series "KUB 810" (see page 289).

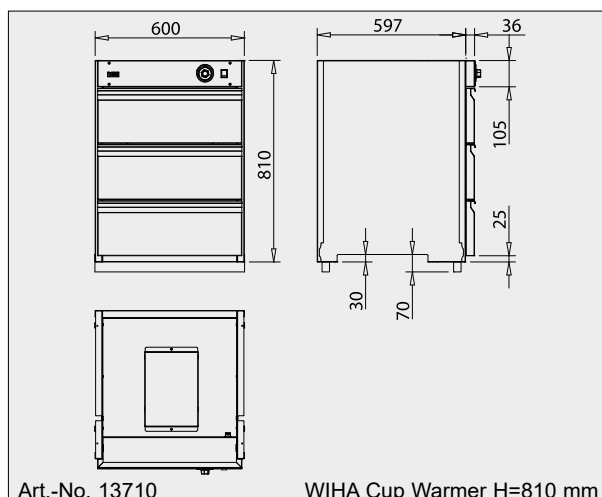

The drawings are shown with special accessory that is not included.

The Well-Organised Cup Warmer

No more time-consuming restacking



Design

The circulating air hot cupboard is manufactured as a built-in module, so that it can be integrated into counter installations and wall units. The special circulating air heating with high performance and robust circulating fan ensure a constant and fast heat distribution. Double-leaf design with internal insulation. The inner and outer surfaces are made of stainless steel, material 1.4031. The three or four drawers are fitted out with stainless steel telescopic base units (load capacity 25 kg). The racks (500 mm x 500 mm) from the dishwasher can be placed directly into the bottomless drawers.


Dimensions: width 605 mm, depth 605 mm, height 710 mm
Effective depth of drawers: Art.-No. 2382: 3 x 110 mm, 1 x 160 mm
Art.-No. 2391: 3 x 165 mm
Electrical connection: 230V/50Hz/1300W
Temperature range: approx. 30°C to 80°C

3 Drawers for dishwasher racks
500 mm x 500 mm
4 Drawers for dishwasher racks
500 mm x 500 mm

Art.-No.

2391

2382

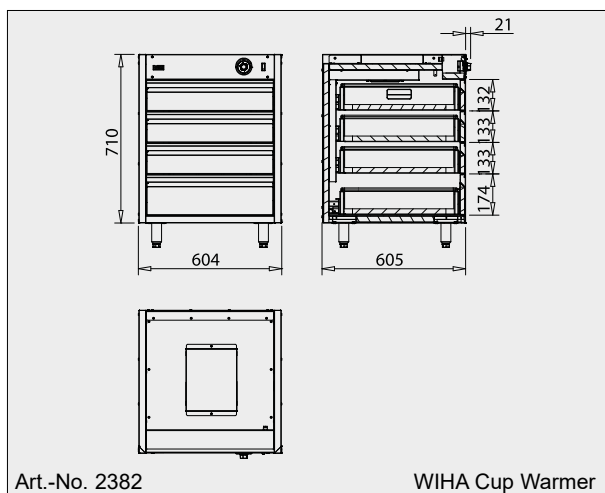


WIHA Cup Warmer

The drawings are shown with special accessory that is not included.

The Well-Organised Cup Warmer

Just remove the rack from the dishwasher and transfer it with cups still on it to the cup warmer.

Tedious cup restacking is a thing of the past.

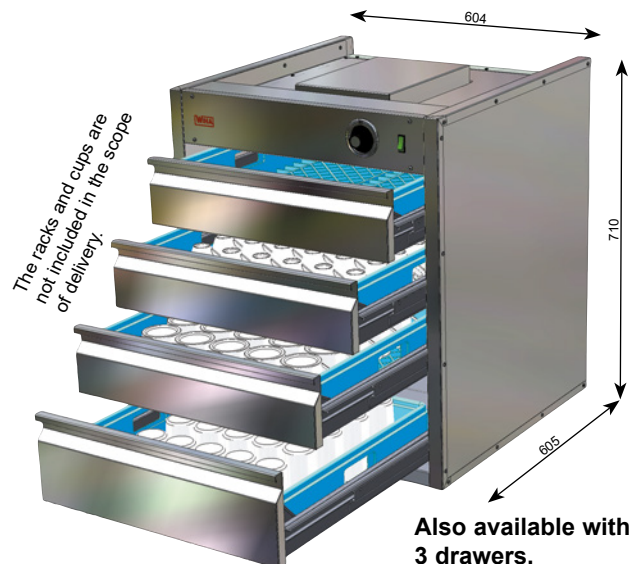

Reliable technology for the commercial operation

- Even heat distribution by circulating air heating
- Great heat output (1200 W)
- Stainless steel telescopic pull-outs
- Service friendly
- For dishwasher racks 500 mm x 500 mm


Special Accessories

Perforated shelf for a use without dishwasher racks
(The effective height of the drawer is reduced by approx. 15 mm.)
Stainless steel feet
(Height: 100 mm to approx. 140 mm)

Art.-No.

13719

9128

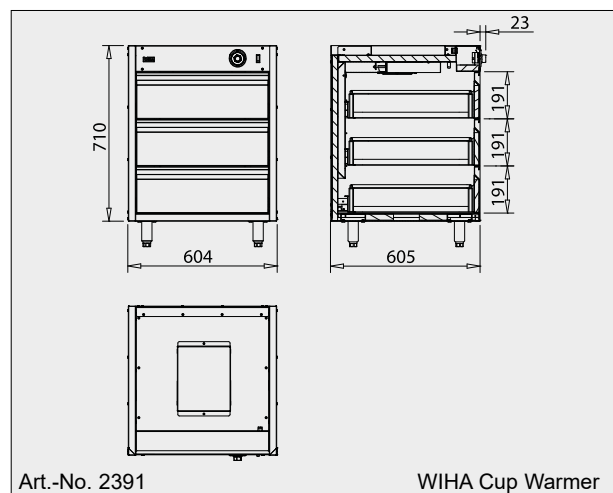

WIHA Cup Warmer