

Euro-Counter ECO E BE

Energy-saving refrigerated display case with insulating glazing on all sides and LED lighting

WiHA ECO⁺ ecologically friendly	WiHA MOVE-AWAY Patented
WiHA Freshness System (Special Accessory) Patented	WiHA LED energy-saving & low-maintenance
WiHA Toughened Safety Glass The front pane, side panes and glass shelves are made of toughened safety glass.	WiHA LONG-LIFE Longer operating life of the cooling unit
WiHA MOVE-DOWN Patented	WiHA SPLIT-CONTROL (Special Accessory) Flat and removable control panel



Soft-closing sliding doors
Special Accessory

Option: EASY-OPEN, see page 131.

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

5
Serve-Over
Display Cases

Euro-Counter ECO 520 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 520 mm					
Euro-Counter ECO 520 E BE - DT 400 *	17296	17297	522	370 W	230V/325W
Euro-Counter ECO 520 E BE - DT 800	11579	12043	922	370 W	230V/330W
Euro-Counter ECO 520 E BE - 1200	11580	12044	1322	450 W	230V/340W
Euro-Counter ECO 520 E BE - 1600	11581	12045	1725	605 W	230V/420W
Euro-Counter ECO 520 E BE - 1600 D **	22340	22341	1725	605 W	230V/420W

The FRESHNESS SYSTEM (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Two temperature zones.

Euro-Counter ECO 710 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 710 mm					
Euro-Counter ECO 710 E BE - DT 400 *	17298	17299	522	370 W	230V/330W
Euro-Counter ECO 710 E BE - DT 800	11582	12046	922	450 W	230V/335W
Euro-Counter ECO 710 E BE - 1200	11583	12047	1322	605 W	230V/410W
Euro-Counter ECO 710 E BE - 1600	11584	12048	1725	825 W	230V/580W
Euro-Counter ECO 710 E BE - 1600 D **	22342	22343	1725	825 W	230V/580W
Euro-Counter ECO 710 E BE - DT 600 L *	17292	17293	722	370 W	230V/330W
Euro-Counter ECO 710 E BE - 1200 L *	17294	17295	1322	450 W	230V/345W

The FRESHNESS SYSTEM (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Two temperature zones.

Special Accessories

Condensate pan mounted under the cooling unit
Condensate pan mounted under the cooling unit (2 temperature zones)
Drain fitting 1 1/4" for connecting to the customer's drain
Protective machine cover type 370/450
Protective machine cover type 605
Protective machine cover type 825/980
Protective machine cover type 605-825 (2 temperature zones)

Art.-No.
33266
33196
3815
8179
8180
8181
33195

Art.-No.
10197
10147
30005
4711
6244
Patented WIHA FRESHNESS SYSTEM see page 126.
Light colour adjustable (meat, cheese or cake) see page 141.
Easy-Open option (easy opening of the front glass) see page 131.
Suitable price label rails see page 161.

5. Display Cases – refrigerated

for serve-over



Description

Energy-saving refrigerated display case with circulating air and insulating glazing on all sides for cooling cakes, cream cakes and snacks. ECO-PLUS version with reduced energy consumption. On the customer side, lateral and on top with insulating glazing made of safety glass. Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION). On the customer side, on the sides and on top with **insulating glazing made of laminated safety glass**. The front glass pane can be swung outwards for easy cleaning. The height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Euro-Norm dimensions (400 mm x 600 mm or 400 mm x 300 mm). The mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

Version 1600 D:

The refrigerated display case is divided with a glass partition in the middle. Both halves can be operated with different temperatures (2 thermostats).

For external cooling unit







Delivery includes:

- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

5
Serve-Over
Display Cases

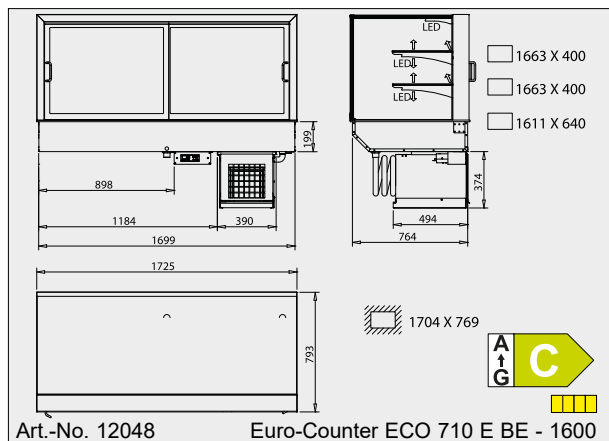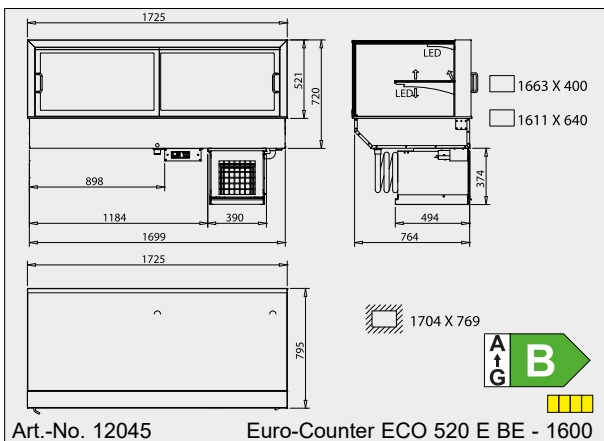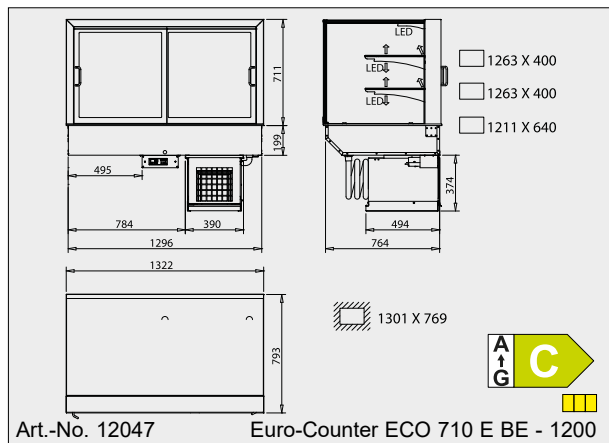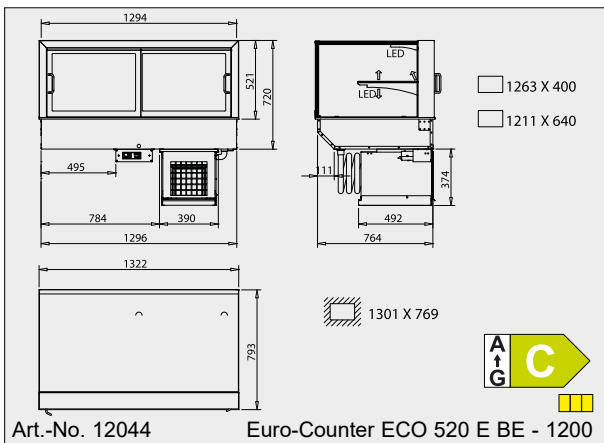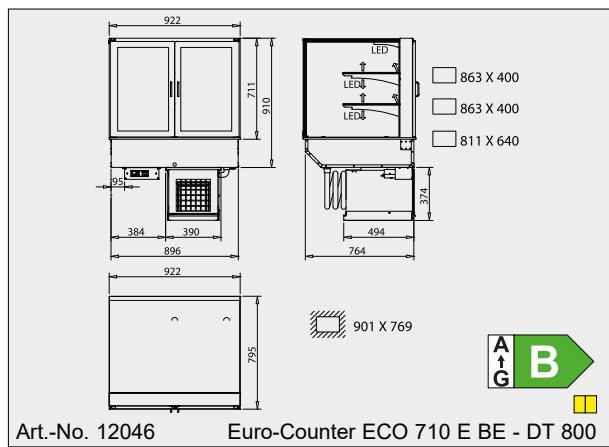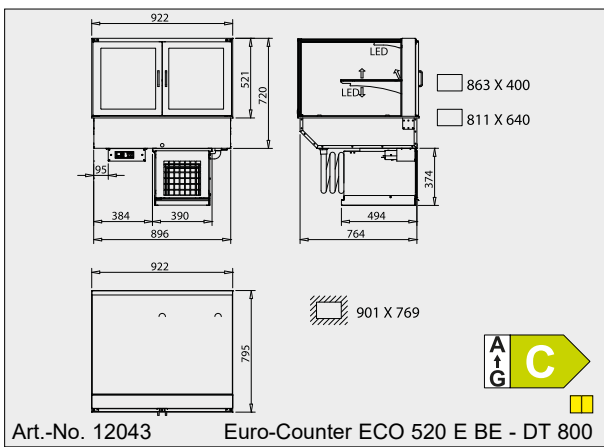

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".