


Front-Counter KO-VT-LS

Self-service version, open on the customer side, with recessed cooling pan, front air curtain and outer casing made of stainless steel to place onto the counter construction (without mounting lip)

<p>Toughened Safety Glass The front pane, side panes and glass shelves are made of toughened safety glass.</p>	<p>LED energy-saving & low-maintenance</p>
<p>MOVE-DOWN Patented</p>	<p>LONG-LIFE Longer operating life of the cooling unit</p>
<p>MOVE-AWAY Patented</p>	<p>SPLIT-CONTROL (Special Accessory) Flat and removable control panel</p>

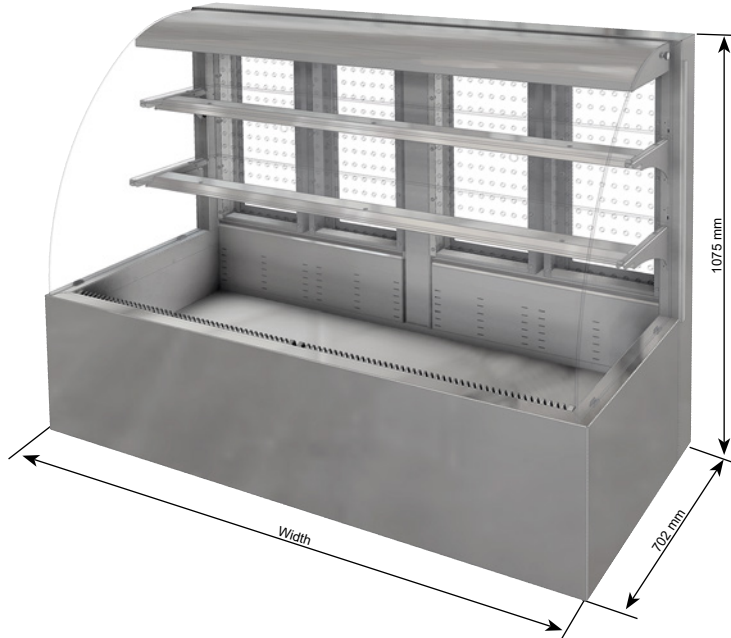

Option: Light colour adjustable, see page 141.

Also available with **bottle slide**, see special accessories.

6
Self-Service Display Cases

Front-Counter 520 KO-VT-LS Self-service version Height glass top 520 mm	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10°ET]	Connection
	round	angled	slanted	round	angled	slanted				
Front-Counter 520 KO-VT-LS - DT 2	23900	23905	23910	23920	23925	23930	750	702	890 W	230V/940W <input type="checkbox"/>
Front-Counter 520 KO-VT-LS - DT 3	23901	23906	23911	23921	23926	23931	1075	702	950 W	230V/960W <input type="checkbox"/>
Front-Counter 520 KO-VT-LS - DT 4	23902	23907	23912	23922	23927	23932	1400	702	1200 W	230V/1230W <input type="checkbox"/>

Protective machine cover and condensate pan/drain trap are available as accessories.
Version with wing doors on the operator side – on the customer side open.

Front-Counter 710 KO-VT-LS Self-service version Height glass top 710 mm	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10°ET]	Connection
	round	angled	slanted	round	angled	slanted				
Front-Counter 710 KO-VT-LS - DT 2	23940	23945	23950	23960	23965	23970	750	702	950 W	230V/950W <input type="checkbox"/>
Front-Counter 710 KO-VT-LS - DT 3	23941	23946	23951	23961	23966	23971	1075	702	1200 W	230V/1235W <input type="checkbox"/>
Front-Counter 710 KO-VT-LS - DT 4	23942	23947	23952	23962	23967	23972	1400	702	1600 W	230V/1365W <input type="checkbox"/>

Protective machine cover and condensate pan/drain trap are available as accessories.
Version with wing doors on the operator side – on the customer side open.

Special Accessories

Condensate pan mounted under the cooling unit **Art.-No. 33196**
 Drain fitting 1 1/4" for connecting to the customer's drain **3815**
 Protective machine cover type 890-1200 **33195**
 Protective machine cover type 1600 **33265**

Bearing rails for GN containers, shelves and bottle slide: (1 pair) **9880**
 Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 206.
 Display shelf, unperforated; width=325 mm **6413**
 (Bearing rails no. 9880 must be ordered separately.)

Bottle slide Snack-Counter GN 2 incl. 10 divider bars **Art.-No. 26467**
 Bottle slide Snack-Counter GN 3 incl. 15 divider bars **26468**
 The bottle slide ensures the replacement of sold bottles and the customers view on a full assortment up to the last bottle.
 Divider bars for bottle slide 520, single **26457**

Suitable price label, see rails page 206.

6. Display Cases – refrigerated

for self-service



Description

Refrigerated display case with circulating air for cooling beverages and packaged food. Self-service version, open on the customer side, with recessed cooling pan, front air curtain and outer casing made of stainless steel to place onto the counter construction (without mounting frame).

The customer side has a rounded, angled or slanted glass construction made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

Self-service version that is open on the customer side, with front air curtain and recessed cooling pan. The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions.

A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

The operator side has wing doors made of insulating glass with transparent, perforated air distribution cover. To clean the gap the air distribution cover can be folded away.

For external cooling unit

Delivery includes:

- Expansion valve for R452A; other refrigerants available on request
- Digital defrost and temperature controller







Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

Please note:

Make sure that there is good ventilation when installing on site!

6 Self-Service Display Cases

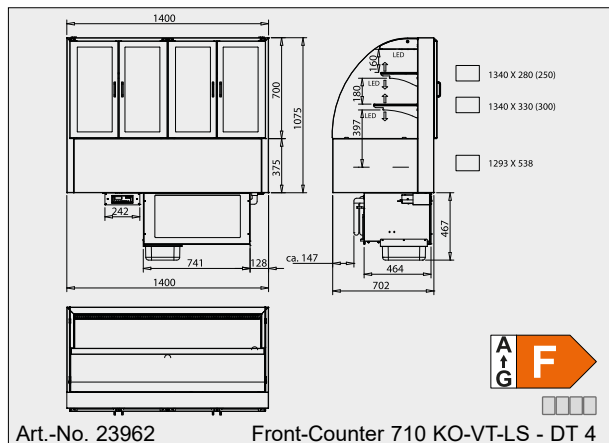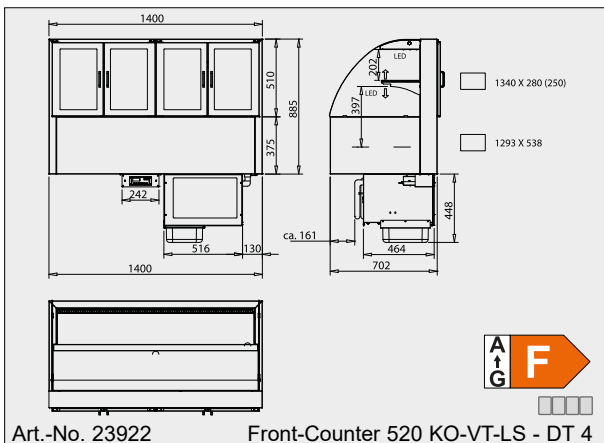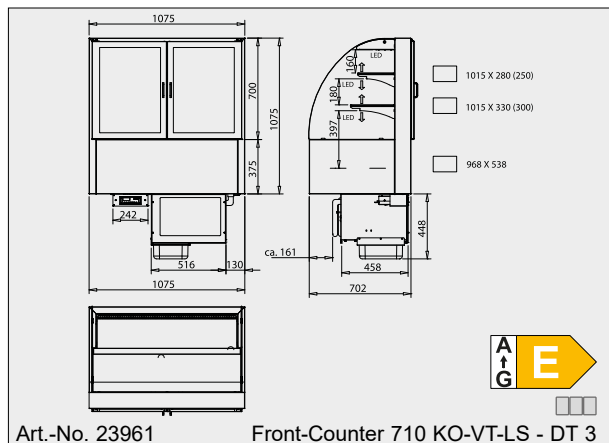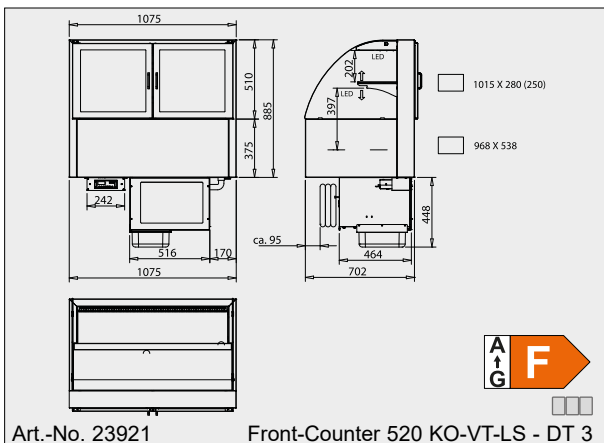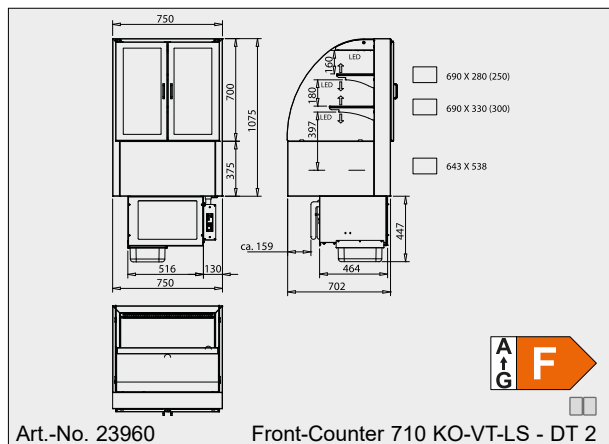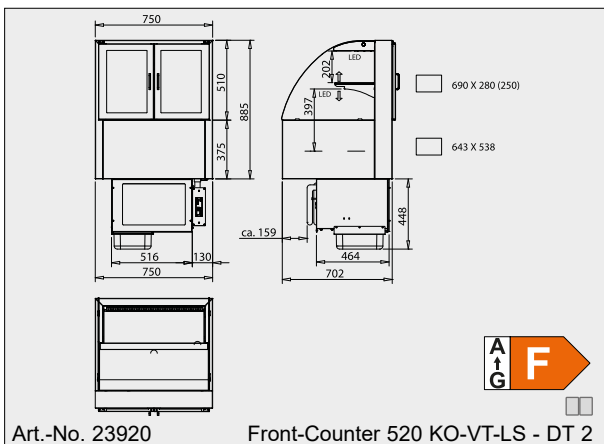

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".