


Front-Counter SB

Self-service version with self-service flaps made of safety glass and outer casing made of stainless steel to place onto the counter construction (without mounting lip)

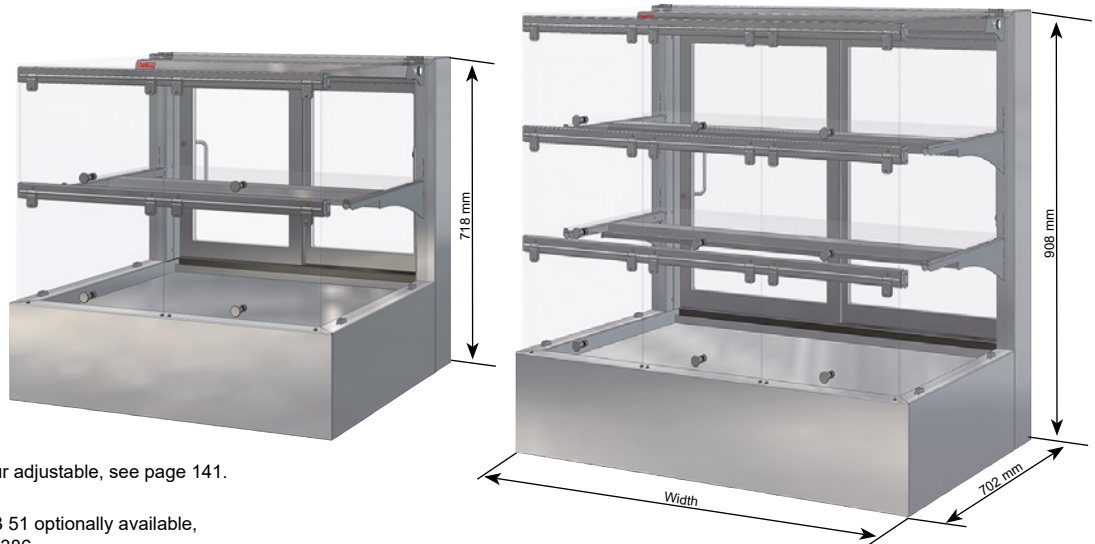

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

6
Self-Service
Display Cases

| Front-Counter 520 SB Self-service version Height glass top 520 mm | For external cooling unit incl. controller | | | With cooling unit and controller | | | Width [mm] | Depth [mm] | Cooling power [-10°ET] | Connection |
|---|--|--------|---------|----------------------------------|--------|---------|------------|------------|------------------------|------------------------------------|
| | round | angled | slanted | round | angled | slanted | | | | |
| Front-Counter 520 SB - GN 2 */** | 23700 | 23705 | 23710 | 23720 | 23725 | 23730 | 750 | 702 | 370 W | 230V/325W <input type="checkbox"/> |
| Front-Counter 520 SB - GN 3 | 23701 | 23706 | 23711 | 23721 | 23726 | 23731 | 1075 | 702 | 370 W | 230V/340W <input type="checkbox"/> |
| Front-Counter 520 SB - GN 4 | 23702 | 23707 | 23712 | 23722 | 23727 | 23732 | 1400 | 702 | 450 W | 230V/400W <input type="checkbox"/> |

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories.
* Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

| Front-Counter 710 SB Self-service version Height glass top 710 mm | For external cooling unit incl. controller | | | With cooling unit and controller | | | Width [mm] | Depth [mm] | Cooling power [-10°ET] | Connection |
|---|--|--------|---------|----------------------------------|--------|---------|------------|------------|------------------------|------------------------------------|
| | round | angled | slanted | round | angled | slanted | | | | |
| Front-Counter 710 SB - GN 2 */** | 23740 | 23745 | 23750 | 23760 | 23765 | 23770 | 750 | 702 | 370 W | 230V/350W <input type="checkbox"/> |
| Front-Counter 710 SB - GN 3 | 23741 | 23746 | 23751 | 23761 | 23766 | 23771 | 1075 | 702 | 450 W | 230V/380W <input type="checkbox"/> |
| Front-Counter 710 SB - GN 4 | 23742 | 23747 | 23752 | 23762 | 23767 | 23772 | 1400 | 702 | 605 W | 230V/540W <input type="checkbox"/> |

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories.
* Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Special Accessories

| | Art.-No. |
|---|--------------|
| Condensate pan mounted under the cooling unit | 33266 |
| Drain fitting 1 1/4" for connecting to the customer's drain | 3815 |
| Protective machine cover type 370/450 | 8179 |
| Protective machine cover type 605 | 8180 |
| Air cooler for operation with refrigerant CO₂ (design see page 384) | 10197 |
| Option soft-close (soft-closing sliding doors) | 4711 |
| Patented WIHA FRESHNESS SYSTEM see page 126. | |
| Suitable price label rails, see page 206. | |



6. Display Cases – refrigerated

for self-service



Description

Refrigerated display case with circulating air for cooling cakes, tarts and snacks.
 Self-service version with self-service flaps made of safety glass and outer casing made of stainless steel to place onto the counter construction (without mounting frame).
 The customer side has a rounded, angled or slanted glass construction made of safety glass.
 The glass shelves can be set at an angle, which means better presentation.
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 Humidity: approx. 70% to 85%.
 Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display, interior pan and exterior are made entirely of stainless steel material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation (CFC-free). Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301.
 To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has self-service flaps made of safety glass. The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail). The side glass panes and height adjustable shelves are made of safety glass. For good illumination, a shielded fluorescent lamp (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

For external cooling unit

Delivery includes:







- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

6
Self-Service
Display Cases

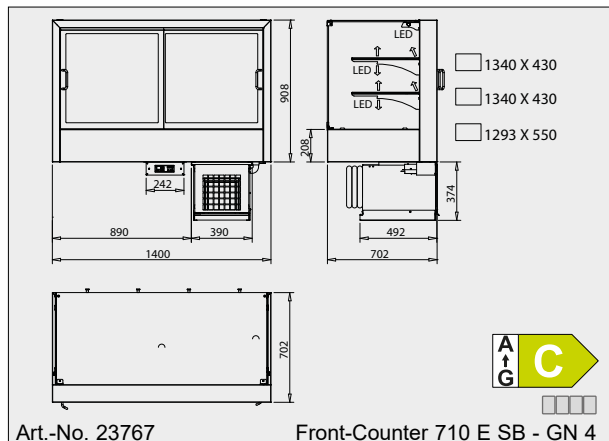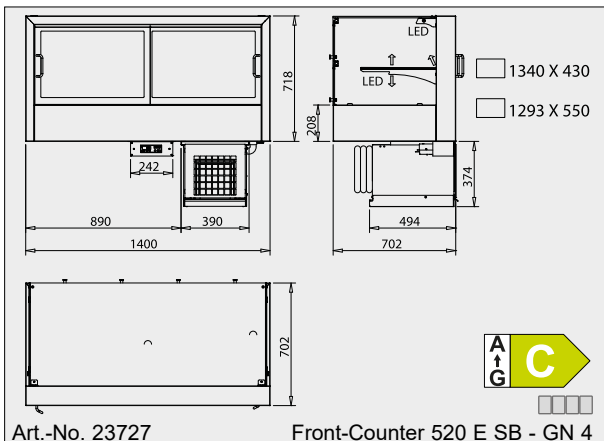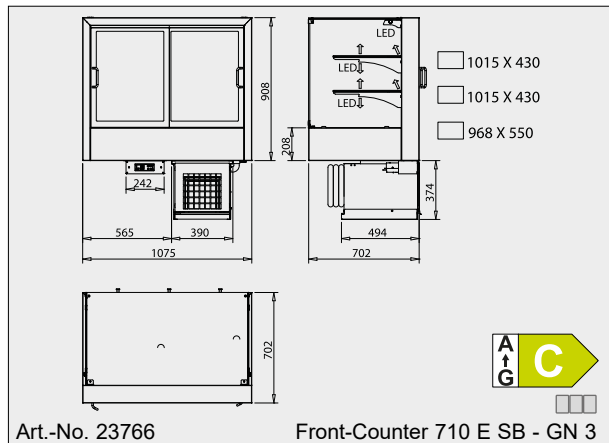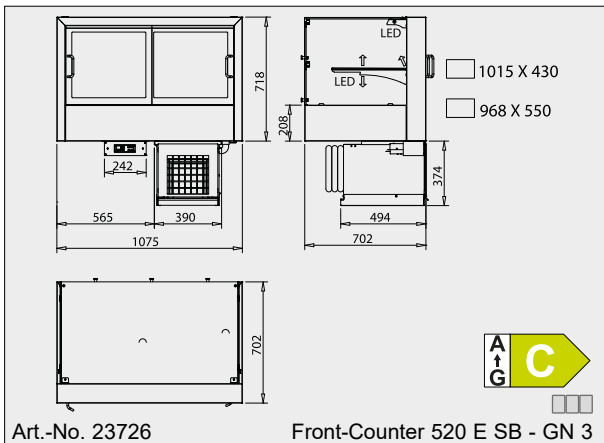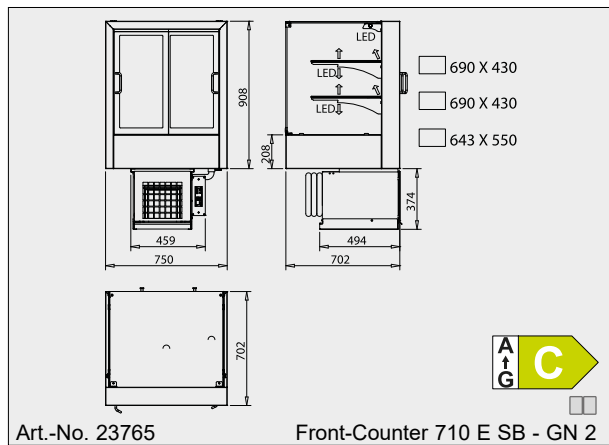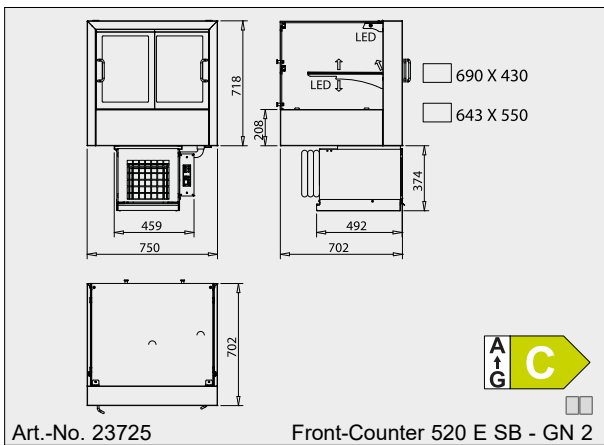

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".