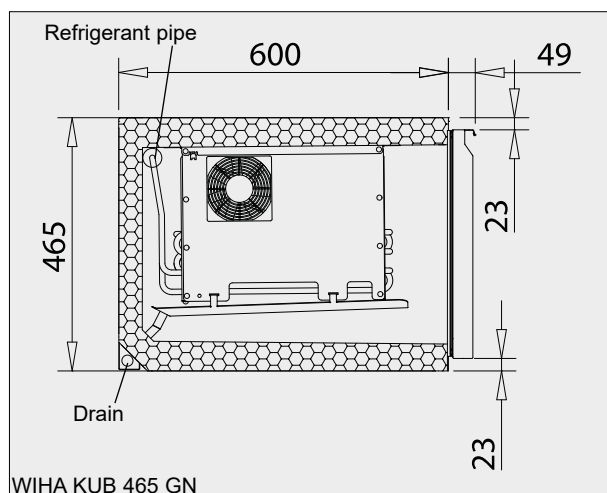








KUB 465 GN – Gastro-Norm Grid, 465 mm High



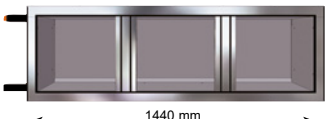
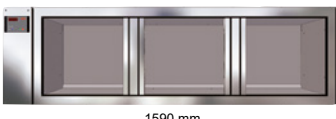
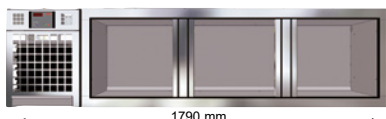
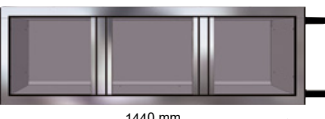
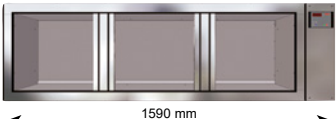
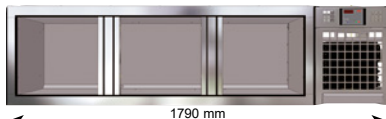
Design see page 277.

Also available with black front.

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 230W/-10°ET	Recommended cooling power: 230W/-10°ET	Cooling power: 230W/-10°ET Elec. connection: 230V/50Hz/240W
 Art.-No. 9028	 Art.-No. 20900	 Art.-No. 9078
 Art.-No. 9029	 Art.-No. 20901	 Art.-No. 9079

Height: 465 mm, depth: 600 mm + 49 mm

10
Under Counter
Refrigerators

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 290W/-10°ET	Recommended cooling power: 290W/-10°ET	Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W
 Art.-No. 9032	 Art.-No. 20902	 Art.-No. 9083
 Art.-No. 9033	 Art.-No. 20903	 Art.-No. 9084

Height 465 mm, depth: 600 mm + 49 mm

10. Under Counter Refrigerators

KUB 465 GN



Inserts KUB 465 GN

Wing Door, Hinge Left (DIN) with 1 supporting grid effective height 355 mm Art.-No. 9205	
Wing Door, Hinge Right (DIN) with 1 supporting grid effective height 355 mm Art.-No. 9206	
Wing Door DIN Left with 3 pairs of bearing rails for GN pans Art.-No. 9109	
Wing Door DIN Right with 3 pairs of bearing rails for GN pans Art.-No. 9110	

Wing Door Hinge Left (DIN), Glass with 1 supporting grid effective height 355 mm Art.-No. 9420	
Wing Door DIN Right, Glass with 1 supporting grid effective height 355 mm Art.-No. 9421	
Wing Door DIN Left, Glass with 3 pairs of bearing rails for GN pans Art.-No. 9422	
Wing Door DIN Right, Glass with 3 pairs of bearing rails for GN pans Art.-No. 9423	

Telescopic Base Unit (stainless steel pullout, load capacity 50 kg) effective height 327 mm Art.-No. 9043	 only for 1 litre PET bottles
Telescopic Base Unit (stainless steel pullout, load capacity 50 kg) eff. depth 122 mm top, 147 mm bottom Art.-No. 9042	
Telescopic Base Unit (stainless steel pullout, load capacity 50 kg) eff. depth 115 mm top, 170 mm bottom Art.-No. 9149	

For 1 x GN 1/1-100 and 1 x GN 1/1-150 Especially suitable for GN pans.

Effective area of the drawers for KUB – GN

Effective height [mm]	Effective area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
337	W 306 mm D 510 mm	PET 1,5 l PET 1,0 l Wine 0,7 l	94 x 337 81 x 299 78 x 311	15 18 24	1x GN 1/1-150 2x GN 1/2-150 2x GN 2/4-150
147	W 306 mm D 510 mm	bottles only in horizontal position			1x GN 1/1-100 2x GN 1/2-100 2x GN 2/4-100
122	W 306 mm D 510 mm	bottles only in horizontal position			1x GN 1/1-100 2x GN 1/2-100 2x GN 2/4-100

When placing your order, please quote the product number of the body and the number of the fronts/inserts from left to right, e.g. 9205 – 9109 – 9043.

10
Under Counter
Refrigerators

Special Accessories

	Art.-No.
Surcharge expansion valve for R452A instead R134a/R513A	9117
GN divider bar for pullout partitioning to accommodate bottles, lockable plastic model	9118
GN divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	9129
GN bearing rail for GN pullout	9057
Extra GN grid with 2 bottom beams	9190
GN intermediate section behind central bar (small grid for the space between 2 compartments)	9191
Extra pair of bearing rails for GN wing door compartment	9051
Base rail, 40 mm high, per r.m. body length	9133
4 round feet, adjustable height approx. 100–140 mm (for 1–2 compartments)	9128
5 round feet, adjustable height approx. 100–140 mm (for 3–4 compartments)	9131
Base retaining bracket for round feet, apiece	9152
Solenoid valve mounted behind the panel	9122
Drill hole 40 mm in body panel	9137
Refrigerant pipes on the rear, centred out of the body	9139
Lock for door or drawer	9157

Description

Under counter refrigerator for cooling foodstuffs in the gastronomy sector.
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

	Art.-No.
TMP 610 controller for standard cooling	12205
Second evaporator (height 465) for external cooling systems	8137
Second evaporator (height 465) for ready-to-use refrigerators	8136
LED lighting 12V/5W (height of compartment 465) (incl. transformer 230V/12V)	9445

Mounting Covers

Width 150 mm, height 465 mm	Art.-No.
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	21100
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	21101
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	21102
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	21203