






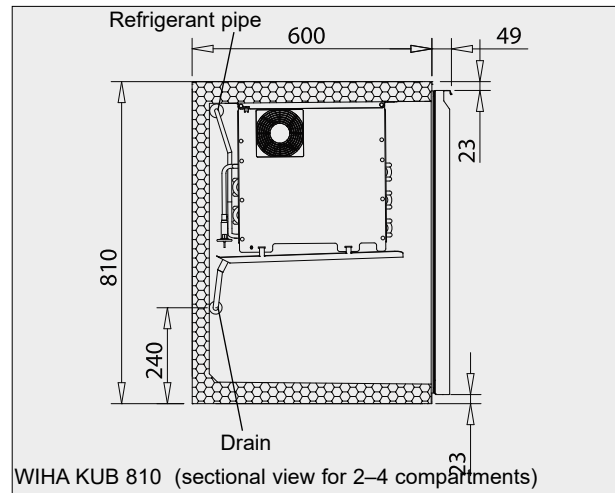


KUB 810 – for Beverages, 810 mm High

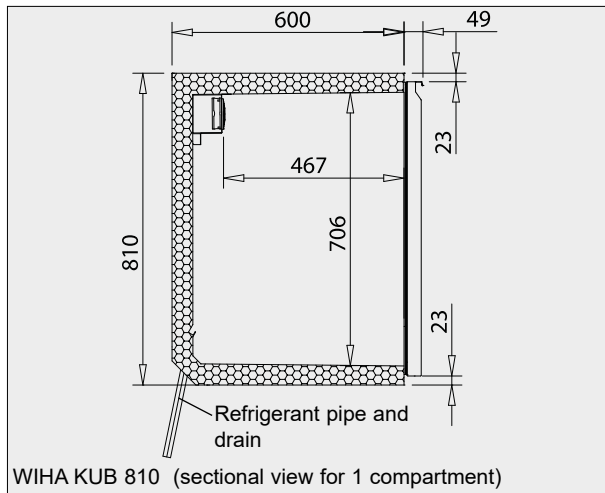

Design see page 277.







Also available with black front.

For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 10521 (*)	 550 mm	Art.-No. 20940 (*)	 700 mm	Art.-No. 10571 (*)	 900 mm
Art.-No. 10531 (*)	 550 mm	Art.-No. 20941 (*)	 700 mm	Art.-No. 10581 (*)	 900 mm

(*) The pullout 10194 cannot be inserted in this model.

Height: 810 mm, depth: 600 mm + 49 mm

10
Under Counter
Refrigerators







For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recommended cooling power: 290W/-10°ET		Recommended cooling power: 290W/-10°ET		Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W	
 Art.-No. 10522 1100 mm		 Art.-No. 20942 1250 mm		 Art.-No. 10572 1450 mm	
 Art.-No. 10532 1100 mm		 Art.-No. 20943 1250 mm		 Art.-No. 10582 1450 mm	

Height: 810 mm, depth: 600 mm + 49 mm







10. Under Counter Refrigerators

KUB 810



For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
 <p>1650 mm</p> <p>Art.-No. 10523</p>	 <p>1800 mm</p> <p>Art.-No. 20944</p>	 <p>2000 mm</p> <p>Art.-No. 10573</p>
 <p>1650 mm</p> <p>Art.-No. 10533</p>	 <p>1800 mm</p> <p>Art.-No. 20945</p>	 <p>2000 mm</p> <p>Art.-No. 10583</p>

Height: 810 mm, depth: 600 mm + 49 mm




For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec connection: 230V/50Hz/380W
 <p>2200 mm</p> <p>Art.-No. 10524</p>	 <p>2350 mm</p> <p>Art.-No. 20946</p>	 <p>2550 mm</p> <p>Art.-No. 10574</p>
 <p>2200 mm</p> <p>Art.-No. 10534</p>	 <p>2350 mm</p> <p>Art.-No. 20947</p>	 <p>2550 mm</p> <p>Art.-No. 10584</p>

Height: 810 mm, depth: 600 mm + 49 mm



10
Under Counter
Refrigerators

Inserts KUB 810

Wing Door DIN Left with 1 supporting grid effective height 700 mm Art.-No. 10182	
Wing Door DIN Right with 1 supporting grid effective height 700 mm Art.-No. 10183	
Wing Door DIN Left with barrel rail for 30 l barrel effective height 695 mm Art.-No. 10184	
Wing Door DIN Right with barrel rail for 30 l barrel effective height 695 mm Art.-No. 10185	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 312 mm top, 305 mm bottom Art.-No. 10198	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 270 mm top, 350 mm bottom Art.-No. 10188	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 350 mm top, 260 mm bottom Art.-No. 10189	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 180 mm / 195 mm / 175 mm Art.-No. 10194 (*)	

(*) The stainless steel roller drawer no. 10194 cannot be inserted in a body with only one compartment!

Wing Door DIN Left, Glass with grid effective height 700 mm Art.-No. 9436	
Wing Door DIN Right, Glass with grid effective height 700 mm Art.-No. 9437	

Effective area of the drawers for KUB 810

Effective height [mm]	Effective area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
350	W 376 mm D 510 mm	PET 1,5 l PET 1,0 l Glass 0,75 l Glass 0,33 l	94 x 337 81 x 303 80 x 321 61 x 234	20 30 30 42	3x GN 1/3-150 6x GN 1/6-150
315	W 376 mm D 510 mm	PET 1,0 l Glass 0,33 l Glass 0,25 l	81 x 303 61 x 234 58 x 216	30 42 56	3x GN 1/3-100 6x GN 1/6-100
270	W 376 mm D 510 mm	Glass 0,33 l Glass 0,25 l	61 x 234 58 x 216	42 56	3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling beverage bottles and beer barrels with a height of 695 mm.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Note:

A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.

The price of the second evaporator is not included in the price and must be added.

Special Accessories

Surcharge expansion valve for R452A instead R134a/R513A	Art.-No. 9117
Divider bar for pullout partitioning to accommodate bottles, lockable plastic model	8882
Divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	8883
GN bearing rail	8886
Extra grid with 2 bottom beams	8885
GN intermediate section behind central bar (small grid for the space between 2 compartments)	9191
GN grid, side limit left	6620
GN grid, side limit right	6621
Base rail, 40 mm high, per r.m. body length	9133
Solenoid valve mounted behind the panel	9122
Drill hole 35 mm in body panel	21140
Drill hole 45 mm in body panel	21141
Drill hole 65 mm in body panel	21142
Drill hole 76 mm in body panel	21144
Drill hole 86 mm in body panel	21145
Refrigerant pipes on the rear, centred out of the body	9139
Lock for door or drawer	9157
TMP 610 controller for standard cooling	12205

Second evaporator for external cooling systems	Art.-No. 8099
Second evaporator for ready-to-use refrigerators	8095

LED lighting 12V/8W (height of compartment 810) (incl. transformer 230V/12V)	9444
--	-------------

Mounting Covers

Width 150 mm, height 810 mm	Art.-No.
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	21120
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	21121
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	21122
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	21123

Under Counter Module for Sinks – 810 mm High

Made entirely of stainless steel

Under Counter Module for Sinks

Design

The 810 mm high under counter module for sinks is made entirely of stainless steel, material 1.4016. The exterior surface of the front side is ground. The module is equipped with wing doors on the front side. On the rear and the sides with cut-outs for the installation of water pipes and waste water pipes. The bottom area of the module for sinks is open to make "base installation" possible.

If required, a bottom plate made of stainless steel is available as accessory and can be inserted on site.

The under counter module for sinks can be attached to the "Under Counter Refrigerators KUB" equipped with two or more compartments.

Also available with black front.

With ready mounted controller for external cooling unit:

Width 450 mm (for single sink), wing door, hinged left	10600-940
Width 450 mm (for single sink), wing door, hinged right	10600-941
Width 800 mm (for double sink)	10601-940

Art.-No.

Without controller, without cooling unit:

Width 450 mm (for single sink), wing door, hinged left	10600-960
Width 450 mm (for single sink), wing door, hinged right	10600-961
Width 800 mm (for double sink)	10601-960

Bottom plate, stainless steel for 10600-940 and 10600-941	10600-050
Bottom plate, stainless steel for 10601-940	10601-050
(Two bottom plates can be inserted in the 800 mm wide under counter module for sinks)	

Waste dumper instead of wing door, for module width=800 mm, mounted left	10604
Waste dumper instead of wing door, for module width=800 mm, mounted right	10605
Waste dumper instead of wing door, for module width=450 mm	10606



Art.-No. 10600-940



Art.-No. 10601-940

End Plate for Under Counter Modules for Sinks and Under Counter Modules

If the side areas of the under counter modules are visible, an end plate is necessary.

The end plate is made of stainless steel, material 1.4016 with ground surface.

It is lined with wood-based material, so that the end plate can be mounted easily with wood screws from the inside of the under counter module.

Dimensions: Height 810 mm, depth 600 mm, thickness 20 mm

End plate height=810 mm

Art.-No.
9136



Base Rails

Base rail, 40 mm high,
price per r.m. body length, fully mounted

Art.-No.
9133

Base rail, 50 mm high,
price per r.m. body length, fully mounted

Art.-No.
9134