






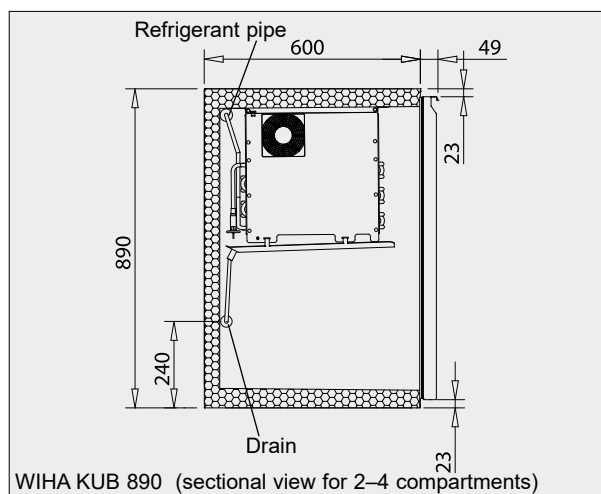


KUB 890 – for Beverages, 890 mm High

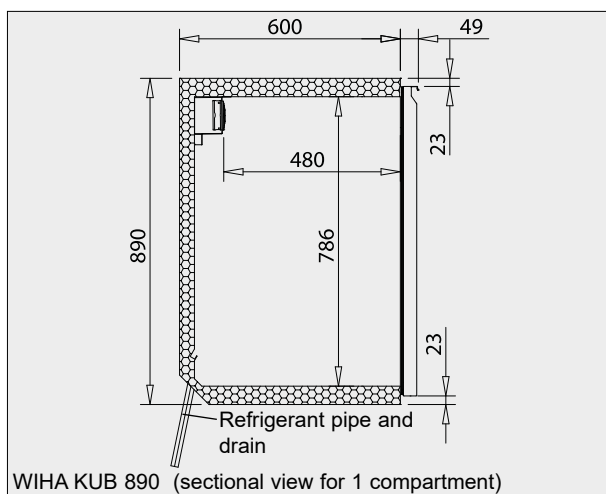







Design see page 277.

Also available with black front.

For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 8921 (*)		Art.-No. 20950 (*)		Art.-No. 8971 (*)	
	550 mm		700 mm		900 mm
Art.-No. 8931 (*)		Art.-No. 20951 (*)		Art.-No. 8981 (*)	
	550 mm		700 mm		900 mm

Height: 890 mm, depth: 600 mm + 49 mm

(*) The stainless steel roller drawer no. 8799 cannot be inserted in a body with only 1 compartment.







For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recommended cooling power: 290W/-10°ET		Recommended cooling power: 290W/-10°ET		Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W	
					
Art.-No. 8922		Art.-No. 20952		Art.-No. 8972	
1100 mm		1250 mm		1450 mm	
					
Art.-No. 8932		Art.-No. 20953		Art.-No. 8982	
1100 mm		1250 mm		1450 mm	

Height: 890 mm, depth: 600 mm + 49 mm





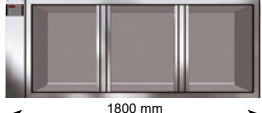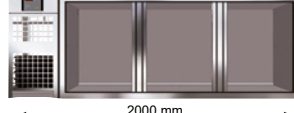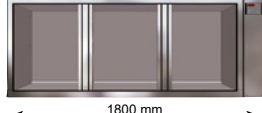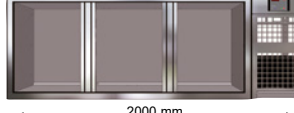

10. Under Counter Refrigerators

KUB 890



For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
 1650 mm Art.-No. 8923	 1800 mm Art.-No. 20954	 2000 mm Art.-No. 8973
 1650 mm Art.-No. 8933	 1800 mm Art.-No. 20955	 2000 mm Art.-No. 8983

Height: 890 mm, depth: 600 mm + 49 mm



For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec. connection: 230V/50Hz/380W
 2200 mm Art.-No. 8924	 2350 mm Art.-No. 20956	 2550 mm Art.-No. 8974
 2200 mm Art.-No. 8934	 2350 mm Art.-No. 20957	 2550 mm Art.-No. 8984

Height: 890 mm, depth: 600 mm + 49 mm

10
Under Counter
Refrigerators

Inserts KUB 890

Wing Door DIN Left with 1 supporting grid effective height 780 mm <u>Art.-No.</u> 8782	
Wing Door DIN Right with 1 supporting grid effective height 780 mm <u>Art.-No.</u> 8783	
Wing Door DIN Left with barrel rail effective height 775 mm <u>Art.-No.</u> 8784	
Wing Door DIN Right with barrel rail effective height 775 mm <u>Art.-No.</u> 8785	

Wing Door DIN Left, Glass with grid effective height 780 mm <u>Art.-No.</u> 9440	
Wing Door DIN Right, Glass with grid effective height 780 mm <u>Art.-No.</u> 9441	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 355 mm top, 345 mm bottom <u>Art.-No.</u> 8798	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 310 mm top, 390 mm bottom <u>Art.-No.</u> 8788	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 390 mm top, 300 mm bottom <u>Art.-No.</u> 8789	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 200 mm / 215 mm / 230 mm <u>Art.-No.</u> 8799 (*)	

(*) The stainless steel roller drawer no. 8799 cannot be inserted in a body with only 1 compartment!

Effective area of the drawers for KUB 890

Effective height [mm]	Effective area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
390	W 376 mm D 510 mm	PET 1,5 l PET 1,0 l Glass 0,75 l	94 x 337 81 x 303 80 x 321	20 24 30	3x GN 1/3-150 6x GN 1/6-150
355 345	W 376 mm D 510 mm	PET 1,5 l Glass 0,75 l Glass 0,33 l	94 x 337 80 x 321 61 x 234	20 30 42	3x GN 1/3-150 6x GN 1/6-150
230	W 376 mm D 510 mm	Glass 0,25 l Glass 0,2 l	58 x 216 60 x 199	56 48	3x GN 1/3-100 6x GN 1/6-100
210	W 376 mm D 510 mm	Glass 0,33 l Glass 0,2 l	70 x 175 60 x 199	35 48	3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling beverage bottles and beer barrels with a height of 775 mm.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Note:

A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.

The price of the second evaporator is not included in the price and must be added.

Special Accessories

	<u>Art.-No.</u>
Surcharge expansion valve for R452A instead R134a/R513A	9117
Divider bar for pullout partitioning to accommodate bottles, lockable plastic model	8882
Divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	8883
GN bearing rails	8886
Extra grid with 2 bottom beams	8885
GN intermediate section behind central bar (small grid for the space between 2 compartments)	9191
GN grid, side limit left	6620
GN grid, side limit right	6621
Base rail, 40 mm high, per r.m. body length	9133
Solenoid valve mounted behind the panel	9122
Drill hole 35 mm in body panel	21140
Drill hole 45 mm in body panel	21141
Drill hole 65 mm in body panel	21142
Drill hole 76 mm in body panel	21144
Drill hole 86 mm in body panel	21145
Refrigerant pipes on the rear, centred out of the body	9139
Lock for door or drawer	9157
TMP 610 controller for standard cooling	12205

	<u>Art.-No.</u>
Second evaporator for external cooling systems	8099
Second evaporator for ready-to-use refrigerators	8095

LED lighting 12V/8W (height of compartment 890) (incl. transformer 230V/12V)	9446
--	-------------

Mounting Covers

Width 150 mm, height 890 mm	<u>Art.-No.</u>
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	21130
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	21131
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	21132
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	21133

10. Under Counter Refrigerators



Under Counter Module for Sinks – 890 mm High

Made entirely of stainless steel

Under Counter Module for Sinks

Design

The 890 mm high under counter module for sinks is made entirely of stainless steel, material 1.4016. The exterior surface of the front side is ground. The module is equipped with wing doors on the front side. On the rear and the sides with cut-outs for the installation of water pipes and waste water pipes. The bottom area of the module for sinks is open to make "base installation" possible.

If required, a bottom plate made of stainless steel is available as accessory and can be inserted on site.

The under counter module for sinks can be attached to the „Under Counter Refrigerators KUB“ equipped with two or more compartments.

Also available with black front.



Art.-No. 8800-940

With ready mounted controller for external cooling unit:

Width 450 mm (for single sink), wing door, hinged left

Art.-No.

8800-940

Width 450 mm (for single sink), wing door, hinged right

8800-941

Width 800 mm (for double sink)

8801-940

Without controller, without cooling unit:

Width 450 mm (for single sink), wing door, hinged left

8800-960

Width 450 mm (for single sink), wing door, hinged right

8800-961

Width 800 mm (for double sink)

8801-960

Bottom plate, stainless steel for 8800-940 and 8800-941

8800-050

Bottom plate, stainless steel for 8801-940

8801-050

(Body 8801-940: two bottom plates can be inserted)

Waste dumper instead of wing door, for module width=800 mm, mounted left

10604

Waste dumper instead of wing door, for module width=800 mm, mounted right

10605

Waste dumper instead of wing door, for module width=450 mm

10606



Art.-No. 8801-940

10
Under Counter
Refrigerators

End Plate for Under Counter Modules for Sinks and Under Counter Modules

If the side areas of the under counter modules are visible, an end plate is necessary.

The end plate is made of stainless steel, material 1.4016 with ground surface.

It is lined with wood-based material, so that the end plate can be mounted easily with wood screws from the inside of the under counter module.

Dimensions: height 890 mm, depth 600 mm, thickness 20 mm

End plate height=890 mm

Art.-No.
9138



Base Rails

Base rail, 40 mm high,
price per r.m. body length, fully mounted

Art.-No.
9133

Base rail, 50 mm high,
price per r.m. body length, fully mounted

Art.-No.
9134