

5. Display Cases – refrigerated

for serve-over



Snack-Counter 870 E BE-VT

Serve-over version with 3 intermediate shelves and deep cooling pan in GN size

WiHA
Toughened Safety Glass
The front pane, side panes and glass shelves are made of toughened safety glass.

WiHA
LONG-LIFE
Longer operating life of the cooling unit

WiHA
MOVE-DOWN
Patented


WiHA
SPLIT-CONTROL
(Special Accessory)
Flat and removable control panel

5
Serve-Over Display Cases

WiHA
MOVE-AWAY
Patented

WiHA
Soft-Close
Soft-closing sliding doors
Special Accessory

WiHA
LED
energy-saving & low-maintenance

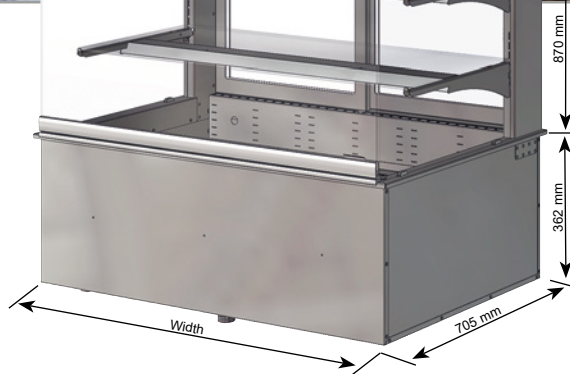

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

Snack-Counter 870 E BE-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 870 mm	angled	angled			
Snack-Counter 870 E BE-VT - 2 *	11508	11512	750	605 W	230V/325W
Snack-Counter 870 E BE-VT - DT 2	11526	11527	750	605 W	230V/325W
Snack-Counter 870 E BE-VT - 3	11509	11513	1075	605 W	230V/340W
Snack-Counter 870 E BE-VT - 4	11510	11514	1400	825 W	230V/400W
Snack-Counter 870 E BE-VT - 5	11511	11515	1725	1060 W	230V/530W

Protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors.
* Max. opening width of the sliding door approx. 277 mm

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting to the customer's drain
Protective machine cover type 605-1060

Air cooler for operation with refrigerant CO₂ (design see page 384)

Option soft-close (soft-closing sliding doors)
Sliding door lockable
Wing door DT lockable

Art.-No.
33196
3815
33195

10197

4711
10147
30005

Bearing rails for GN containers and shelves (1 pair)

Note: GN1/1 and GN2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 139.

Display shelf, unperforated; Width=325 mm (Bearing rails no. 9880 must be ordered separately.)

Suitable price label rails, see page 139.

Art.-No.

9880

6413

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages, salads, delicacies, cakes, cream cakes and snacks.
 On the customer side with angled glass construction made of safety glass.
 The glass shelves are height adjustable and can be set at an angle, which means better presentation.
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 Humidity: approx. 70% to 85%.
 Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
 The vertical walls above the evaporator are provided with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted.
 To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).
 The front glass pane on the customer side is made of safety glass and can be swung outwards for easy cleaning. The side glass panes and the height adjustable shelves are also made of safety glass.

For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit







Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

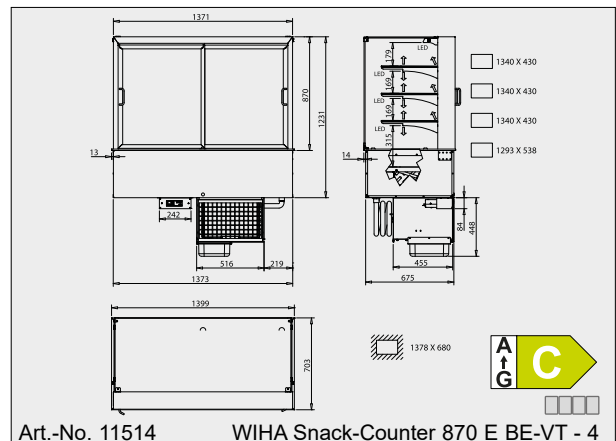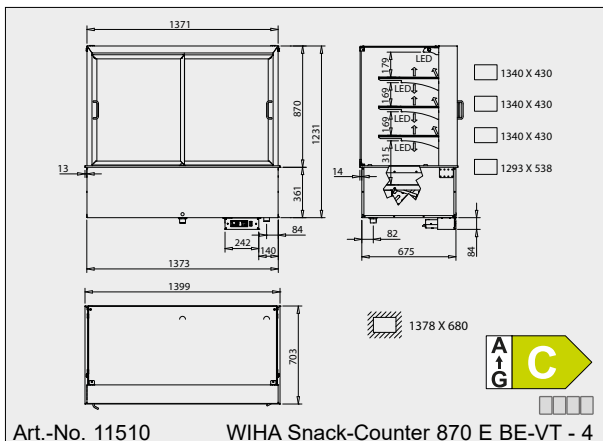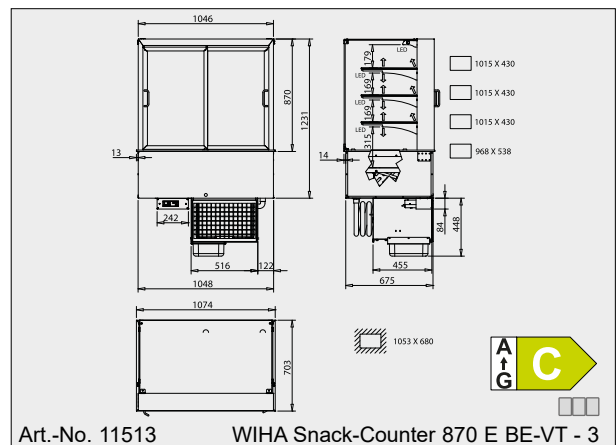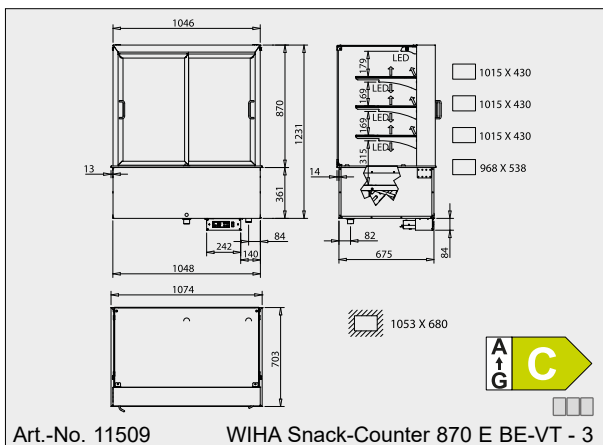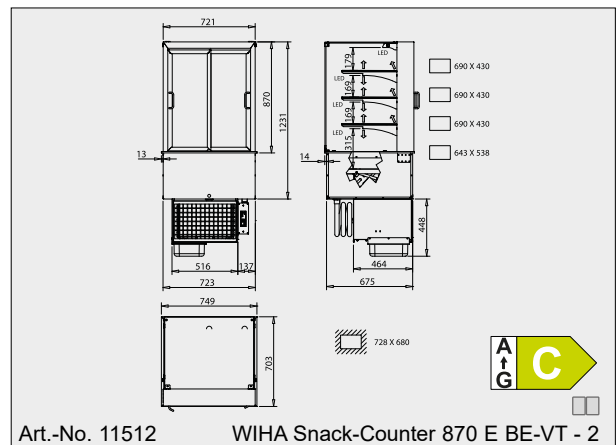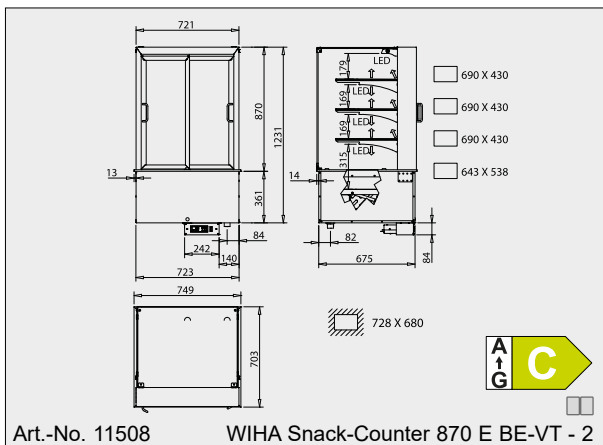

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".