


Snack-Counter 870 E KO-VT a. E KO-VT-RG

Self-service version, open on the customer side and with 3 intermediate shelves and recessed cooling pan in GN size (version RG with closed rear panel)





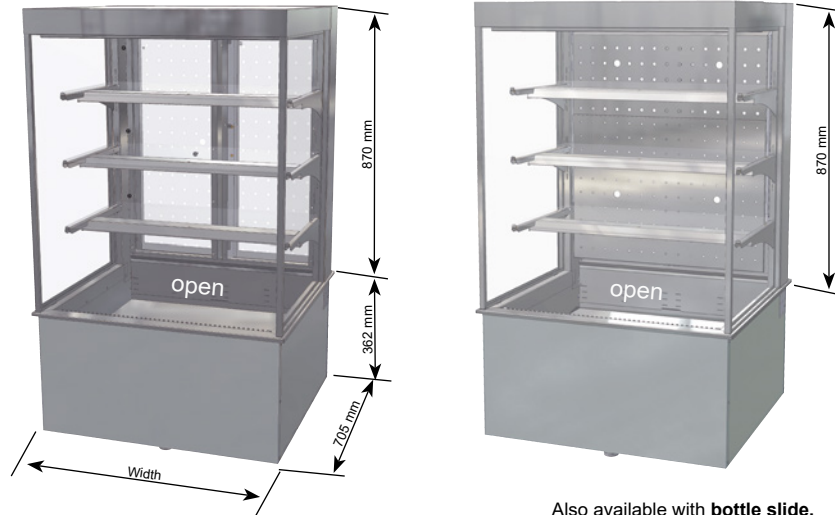


Option: Light colour adjustable, see page 141.

Also available with **bottle slide**, see special accessories.

6
Self-Service
Display Cases






With integrated night blind.

Snack-Counter 870 E KO-VT Rear side with wing doors	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°E†]	Connection
	 angled	 angled			
Self-service version Height glass top 870 mm					
Snack-Counter 870 E KO-VT - DT 2	11516	11520	750	1200 W	230V/1300W 
Snack-Counter 870 E KO-VT - DT 3	11517	11521	1075	1400 W	230V/1500W 
Snack-Counter 870 E KO-VT - DT 4	11518	11522 **	1400	1700 W *	230V/1784W 

Protective machine cover and condensate pan/drain trap are available as accessories.

* When connecting to multi-compressor refrigeration systems, make sure that the suction pressure of the upstream suction pressure regulator is adjustable in the range of -5°C to -15°C.

** Without base element, the cooling unit is connected via refrigerant couplings.

Snack-Counter 870 E KO-VT-RG Rear side closed	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°E†]	Connection
	 angled	 angled			
Self-service version Height glass top 870 mm					
Snack-Counter 870 E KO-VT-RG - 2	10686	10690	750	1200 W *	230V/1300W 
Snack-Counter 870 E KO-VT-RG - 3	10687	10691	1075	1400 W *	230V/1500W 
Snack-Counter 870 E KO-VT-RG - 4	10688	10692	1400	1700 W *	230V/1784W 

Condensate pan/drain trap are available as accessories.

* When connecting to multi-compressor refrigeration systems, make sure that the suction pressure of the upstream suction pressure regulator is adjustable in the range of -5°C to -15°C.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting
to the customer's drain

Art.-No.
33196

3815

Protective machine cover type 1200

33195

Protective machine cover type 1400

33265

Bearing rails for GN containers, shelves and bottle slide:

(1 pair)

9880

Note: GN 1/1 and GN 2/4 containers can be mounted directly,
for smaller GN containers additional separator bars are required,
see page 206.

Display shelf, unperforated; width=325 mm

6413

(Bearing rails no. 9880 must be ordered separately.)

Bottle slide Snack-Counter GN 2

26467

incl. 10 divider bars

Suitable price label rails, see page 206.

Bottle slide Snack-Counter GN 3

Art.-No.
26468

incl. 15 divider bars

The bottle slide ensures the replacement of sold bottles and the customers view
on a full assortment up to the last bottle.

Divider bars for bottle slide 520, single

26457

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages and packaged food.

Self-service version, open on the customer side and with angled glass construction made of insulating glass. Model KO-VT-RG with closed rear panel.

The glass shelves are height adjustable and can be set at an angle, which means better presentation.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

6. Display Cases – refrigerated

for self-service



Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (max. 65 mm deep) can be mounted or display shelves (available as accessories) can be inserted.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

Self-service version that is open on the customer side and with angled glass construction and side glass panes made of insulating glass. The height adjustable shelves are made of safety glass. The customer side has an integrated night blind for an energy-saving night operation. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version KO-VT - DT:

The operator side has wing doors made of insulating glass with transparent, perforated air distribution cover. To clean the gap the air distribution cover can be folded away.

Version KO-VT-RG:

The rear side has a closed rear panel.

For external cooling unit

Delivery includes:

- Expansion valve for R452A; other refrigerants available on request
- Defrost and temperature controller

Cooling Unit Model

Version KO-VT:

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.







Version KO-VT-RG:

The cooling unit is fully pre-assembled and is connected to the cooling pan with refrigerant couplings.

Please note:

The counter design should include a well-ventilated base unit beneath the cooling pan!

6
Self-Service
Display Cases

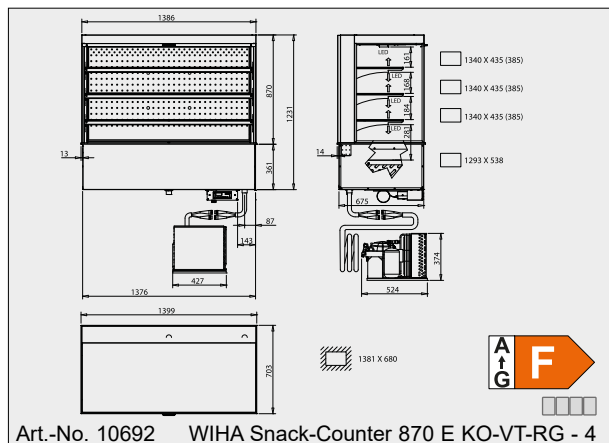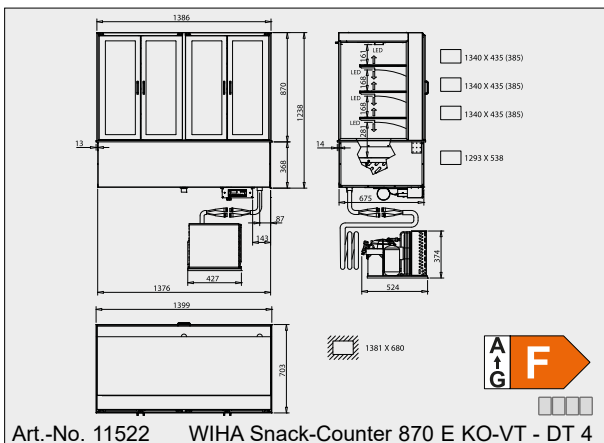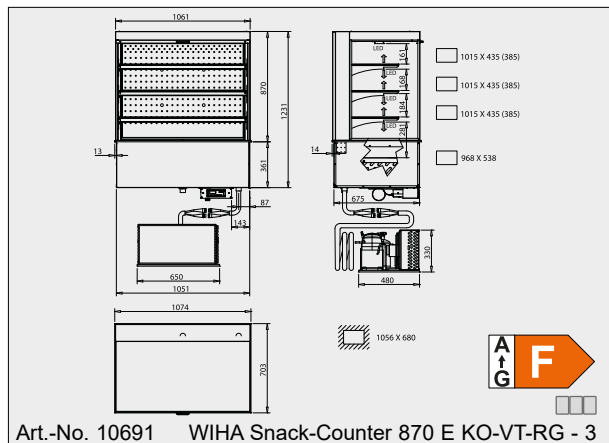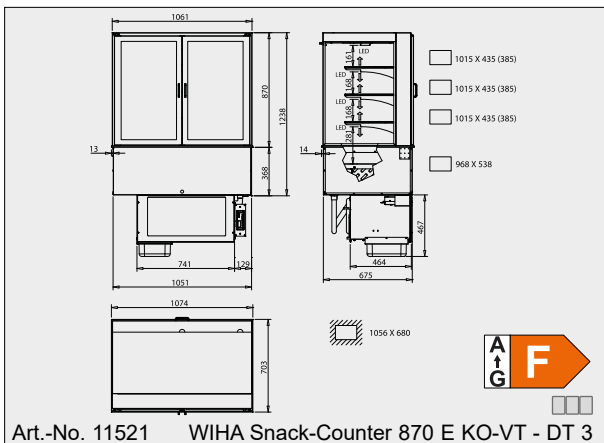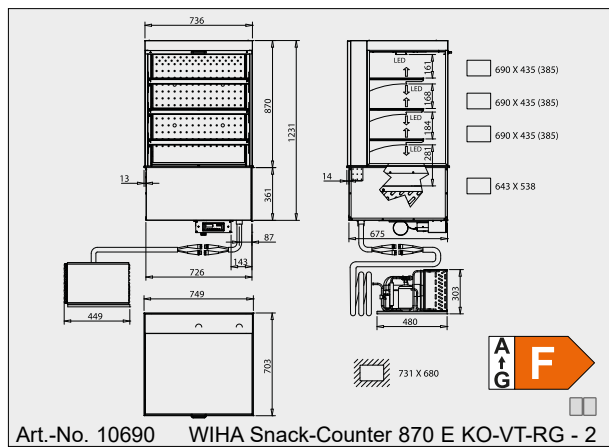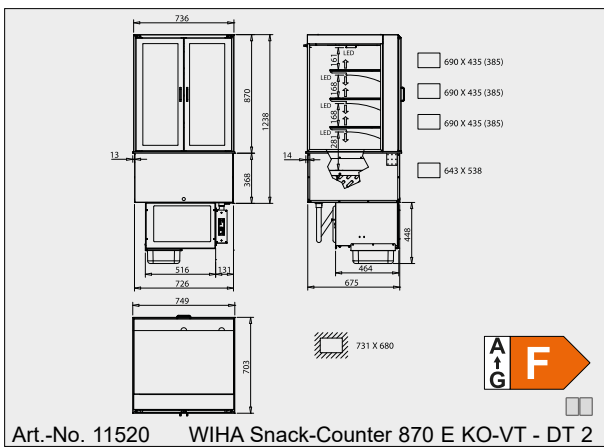

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".