

5. Display Cases – refrigerated

for serve-over



Snack-Counter BE-VT

Serve-over version with recessed cooling pan and glass construction made of toughened safety glass

Toughened Safety Glass
The front pane, side panes and glass shelves are made of toughened safety glass.

LONG-LIFE
Longer operating life of the cooling unit


MOVE-DOWN
Patented

SPLIT-CONTROL
(Special Accessory)
Flat and removable control panel

MOVE-AWAY
Patented

Soft-Close
Soft-closing sliding doors
Special Accessory

LED
energy-saving & low-maintenance

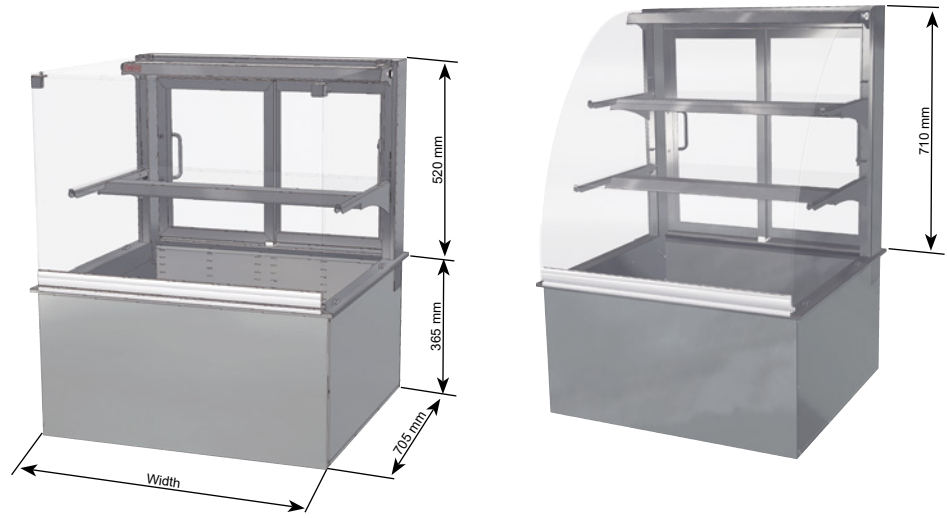

5
Serve-Over
Display Cases

Snack-Counter 520 BE-VT	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Anschluss
Serve-over version Height glass top 520 mm	round	angled	slanted	round	angled	slanted			
Snack-Counter 520 BE-VT - DT 1.5	10270	10274	17064	10272	10276	17076	587	370 W	230V/325W
Snack-Counter 520 BE-VT - 2 *	10300	10038	17065	10302	10290	17077	750	370 W	230V/325W
Snack-Counter 520 BE-VT - DT 2	10301	10298	17066	10303	10299	17078	750	370 W	230V/325W
Snack-Counter 520 BE-VT - 3	10031	10039	17067	10304	10291	17079	1075	370 W	230V/340W
Snack-Counter 520 BE-VT - 4	10032	10040	17068	10305	10292	17080	1400	450 W	230V/400W
Snack-Counter 520 BE-VT - 5	10033	10041	17069	10306	10293	17081	1725	605 W	230V/530W

The protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors.
* Max. opening width of the sliding door approx. 277 mm.

Snack-Counter 710 BE-VT	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 710 mm	round	angled	slanted	round	angled	slanted			
Snack-Counter 710 BE-VT - DT 1.5	10271	10275	17070	10273	10277	17082	587	370 W	230V/325W
Snack-Counter 710 BE-VT - 2 *	10034	10042	17071	10308	10294	17083	750	370 W	230V/350W
Snack-Counter 710 BE-VT - DT 2	10307	10300	17072	10309	10374	17084	750	370 W	230V/350W
Snack-Counter 710 BE-VT - 3	10035	10043	17073	10310	10295	17085	1075	450 W	230V/380W
Snack-Counter 710 BE-VT - 4	10036	10044	17074	10311	10296	17086	1400	605 W	230V/540W
Snack-Counter 710 BE-VT - 5	10037	10045	17075	10312	10297	17087	1725	825 W	230V/715W

The protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors.
* Max. opening width of the sliding door approx. 277 mm.

Base element UTB 51 optionally available, see table on page 386.

Option: Light colour adjustable, see page 141.

Special Accessories

Condensate pan mounted under the cooling unit	Art.-No.	
Drain fitting 1 1/4" for connecting to the customer's drain	33266	
Protective machine cover type 370/450	3815	
Protective machine cover type 605	8179	
Protective machine cover type 825/980	8180	
	8181	
Air cooler for operation with refrigerant CO₂ (design see page 384)	10197	
Sliding door lockable	10147	
Wing door DT lockable	30005	

Option soft-close (soft-closing sliding doors)	Art.-No.	
	4711	
Bearing rails for GN containers and shelves		
Snack-Counter size per GN 1 (1 pair)	9880	
Snack-Counter size GN 1.5 (1 pair)	10507	
Note: GN 1/1- and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 139.		
Display shelf, unperforated; W=325 mm, GN 1	6413	
Display shelf, unperforated; W=486 mm, GN 1.5 (Bearing rails must be ordered separately.)	10506	
Suitable price label rails, see page 139.		

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages, salads, delicacies, cakes, cream cakes and snacks.
 On the customer side with rounded, angled or slanted glass construction made of safety glass.
 The glass shelves are height adjustable and can be set at an angle, which means better presentation.
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 Humidity: approx. 70% to 85%.
 Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
 The vertical walls above the evaporator are provided with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–150 mm deep) can be mounted or display shelves (available as accessories) can be inserted.
 To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The front glass pane is made of safety glass and can be swung outwards for easy cleaning. The side glass panes and the height adjustable shelves are also made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.
 A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).







For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.
 A condensate pan is available as accessory.

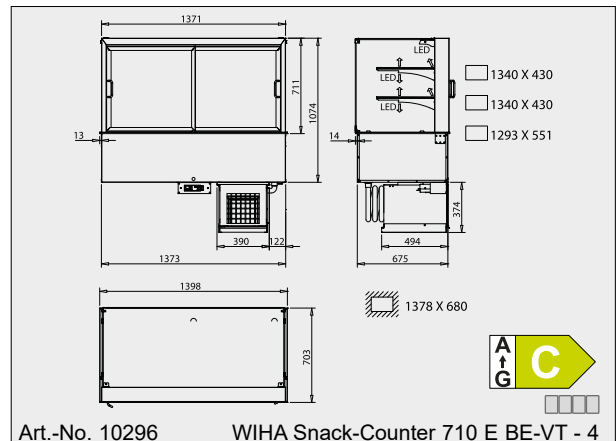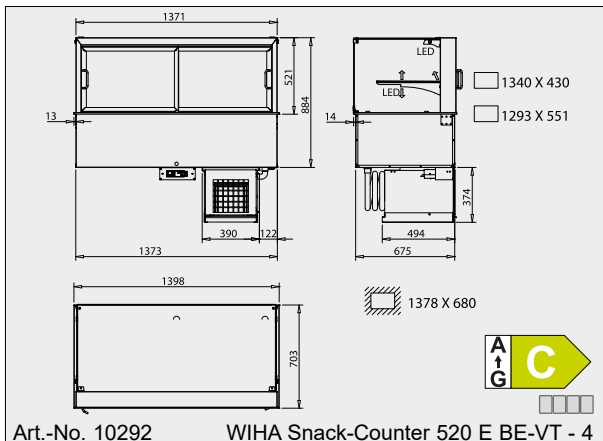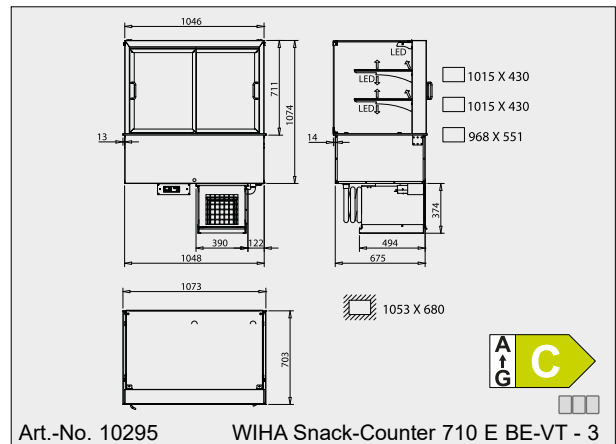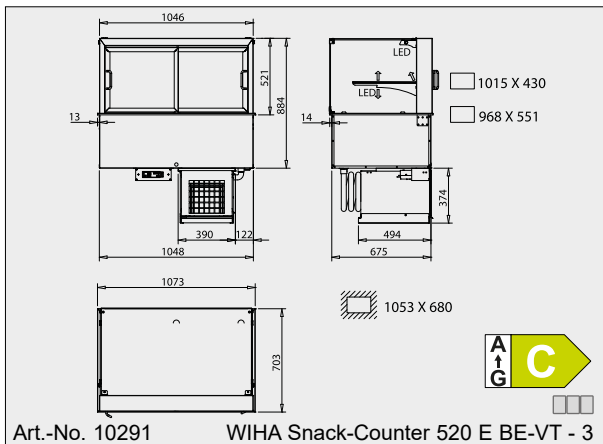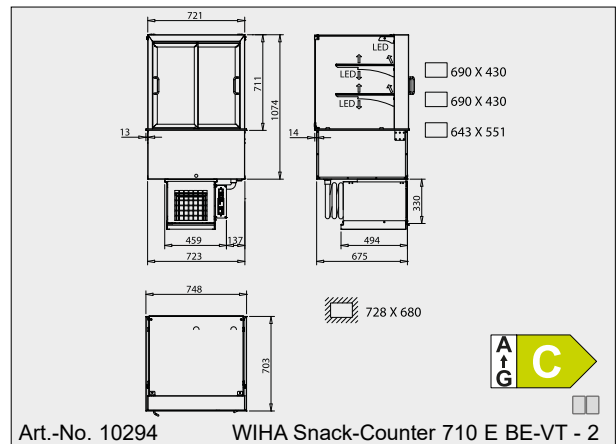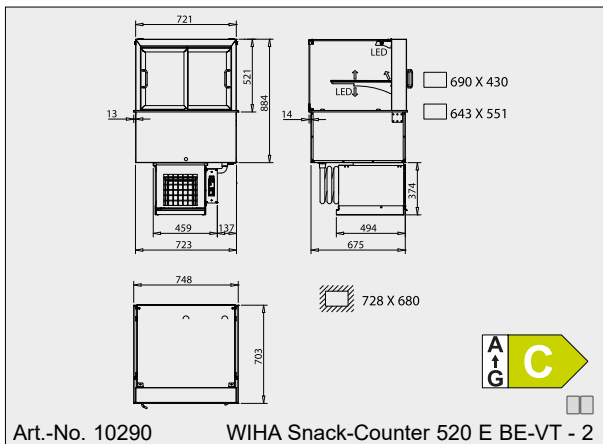

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".