

Snack-Counter ECO BE

Energy-saving refrigerated display case with insulating glazing on all sides and LED lighting

ECO+
ecologically friendly

MOVE-AWAY
Patented

Freshness System
(Special Accessory)
Patented


LED
energy-saving & low-maintenance

Toughened Safety Glass
The front pane, side panes and glass shelves are made of toughened safety glass.

LONG-LIFE
Longer operating life of the cooling unit

MOVE-DOWN
Patented

SPLIT-CONTROL
(Special Accessory)
Flat and removable control panel

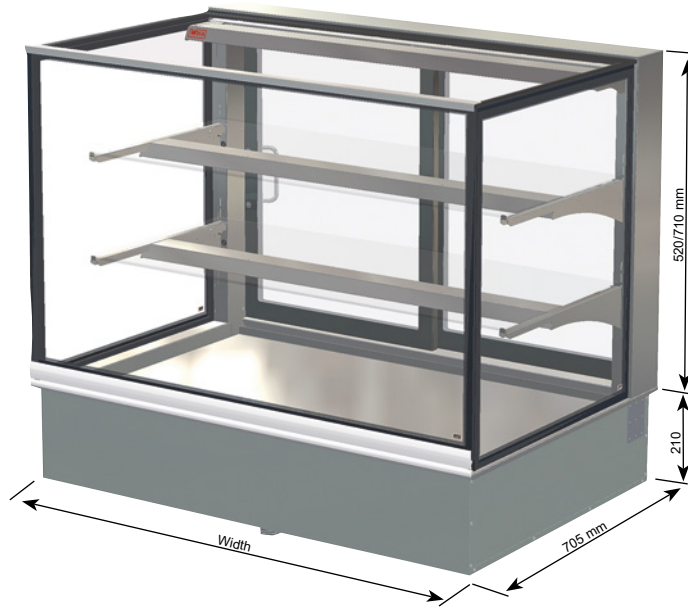

Soft-Close
Soft-closing sliding doors
Special Accessory

Option: EASY-OPEN, see page 131.

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

Suitable price label rails, see page 139.

5
Serve-Over Display Cases

Snack-Counter ECO 520 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 520 mm					
Snack-Counter ECO 520 E BE - DT 1.5 *	11690	11691	587	370 W	230V/325W
Snack-Counter ECO 520 E BE - 2 **	11571	12035	750	370 W	230V/325W
Snack-Counter ECO 520 E BE - DT 2 *	11585	12050	750	370 W	230V/325W
Snack-Counter ECO 520 E BE - 3	11572	12036	1075	370 W	230V/340W
Snack-Counter ECO 520 E BE - 4	11573	12037	1400	450 W	230V/345W
Snack-Counter ECO 520 E BE - 5	11574	12038	1725	605 W	230V/422W

The FRESHNESS SYSTEM (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO 710 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 710 mm					
Snack-Counter ECO 710 E BE - DT 1.5 *	11692	11693	587	370 W	230V/330W
Snack-Counter ECO 710 E BE - 2 **	11575	12039	750	370 W	230V/330W
Snack-Counter ECO 710 E BE - DT 2 *	11586	12051	750	370 W	230V/330W
Snack-Counter ECO 710 E BE - 3	11576	12040	1075	450 W	230V/340W
Snack-Counter ECO 710 E BE - 4	11577	12041	1400	605 W	230V/420W
Snack-Counter ECO 710 E BE - 5	11578	12042	1725	825 W	230V/580W

The FRESHNESS SYSTEM (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO

- Energy-saving
- All external glass panes made of insulating glass
- Low-maintenance LED lighting
- No condensation on the front glass pane! *
- Front glass pane, side glass panes and upper glass pane made of insulating laminated safety glass
- Longer operating life of the cooling unit (LONG-LIFE)
- Energy-saving EC fan motors (low voltage)
- Temperature: < 5 °C at an ambient temperature of 25 °C
- Liftable evaporator for easy cleaning
- Coated lamellar evaporator
- Patented MOVE-DOWN and MOVE-AWAY TECHNOLOGY for easy cleaning

* At setpoint 6 °C/AT 25 °C/RH. 70%.

Special Accessories

Condensate pan mounted under the cooling unit	Art.-No.
Drain fitting 1 1/4" for connecting to the customer's drain	33266
Protective machine cover type 370/450	3815
Protective machine cover type 605	8179
Protective machine cover type 825/980	8180
Air cooler for operation with refrigerant CO₂	8181
(design see page 384)	10197
Sliding door lockable	10147
Wing door DT lockable	30005
Option soft-close (soft-closing sliding doors)	4711
Suction cup with handle (for easy opening of the front pane)	6244
Patented WIHA FRESHNESS SYSTEM see page 126.	
Light colour adjustable (meat, cheese or cake) see page 141.	
Easy-Open option (easy opening of the front glass) see page 131.	

5. Display Cases – refrigerated

for serve-over



Description

Energy-saving refrigerated display case with circulating air and insulating glazing on all sides for cooling cakes, cream cakes and snacks. ECO-PLUS version with reduced energy consumption. On the customer side, lateral and on top with insulating glazing made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION). On the customer side, on the sides and on top with insulating glazing made of laminated safety glass. The front glass pane can be swung outwards for easy cleaning. The height adjustable

shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m). **With WIHA-LONG-LIFE for a longer operating life of the cooling unit.**

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit







Delivery includes:

- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

5
Serve-Over
Display Cases

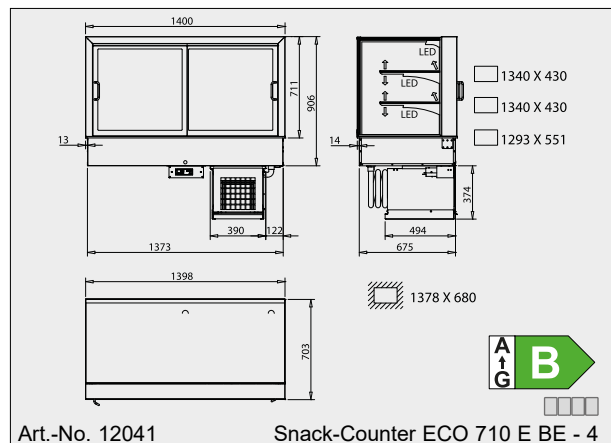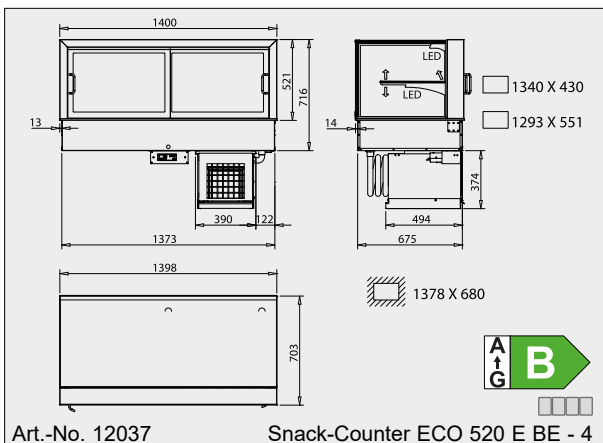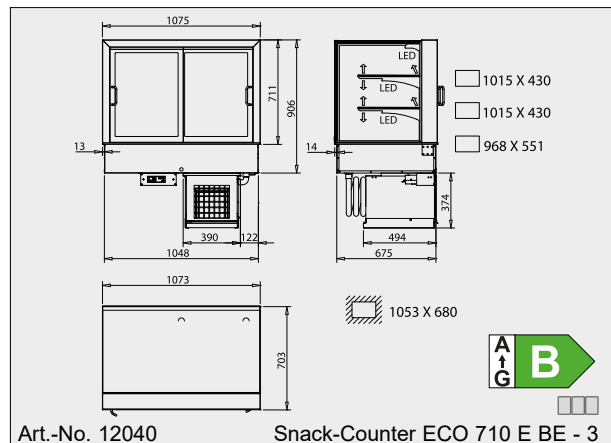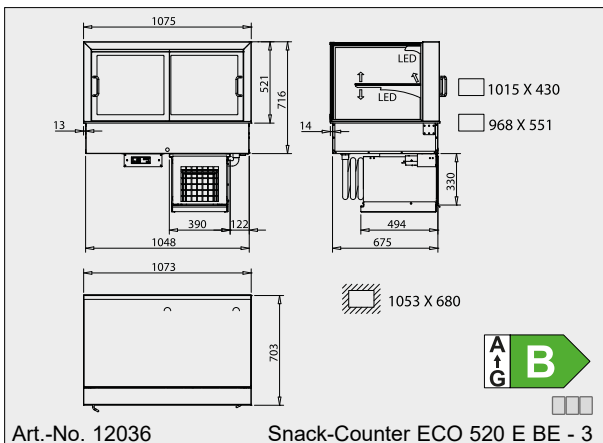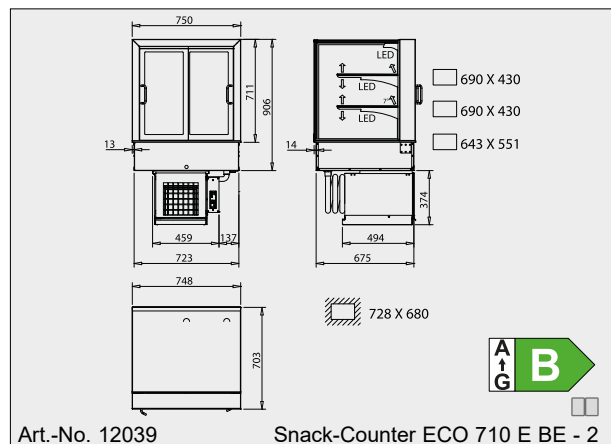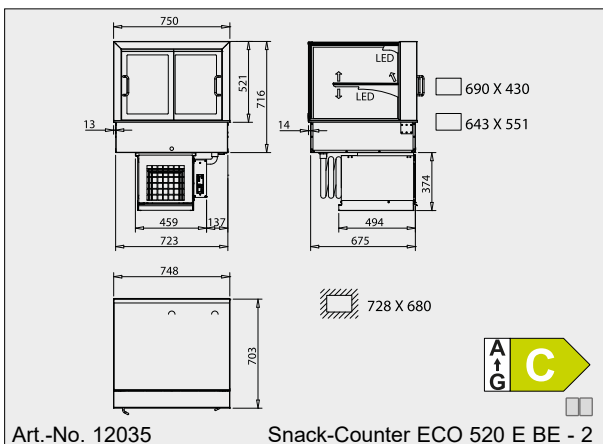

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".