


## 8. Display Cases – neutral

without cooling system



### Snack-Counter ECO OK-BE (without cooling system)

Serve-over version with insulating glazing on all sides and energy-saving LED lighting

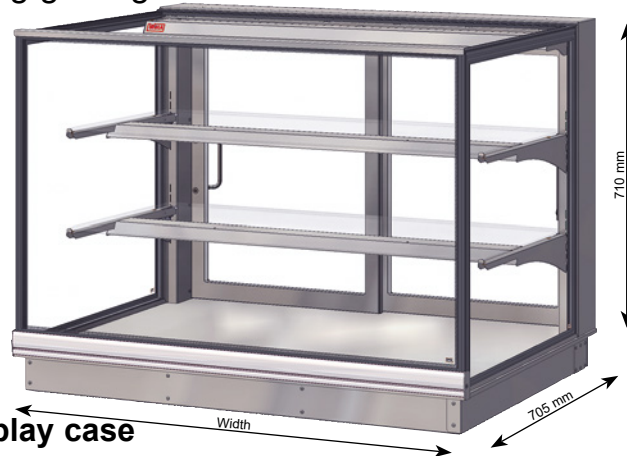

#### The uncooled Snack-Counter ECO built-in display case

- For the sale of uncooled products
- Design is suitable for the cooled Snack-Counter ECO display cases
- Many variations possible because the display cases of this series can be mounted side by side without a gap
- Energy-efficient LED lighting
- For easy cleaning, the front glass pane can be opened
- High safety standard due to the safety glazing

Snack-Counter ECO 520 E OK-BE Serve-over version Height glass top 520 mm	Operator side is open	Operator side with wing doors or sliding doors	Width [mm]	Connection	
	angled	angled			
Snack-Counter ECO 520 E OK-BE - 1.5	12183	---	587	230V/15W	
Snack-Counter ECO 520 E OK-BE - DT 1.5	---	12184 **	587	230V/15W	
Snack-Counter ECO 520 E OK-BE - 2	12066	12052 *	750	230V/18W	
Snack-Counter ECO 520 E OK-BE - DT 2	---	12085 **	750	230V/18W	
Snack-Counter ECO 520 E OK-BE - 3	12067	12053	1075	230V/26W	
Snack-Counter ECO 520 E OK-BE - 4	12068	12054	1400	230V/36W	
Snack-Counter ECO 520 E OK-BE - 5	12069	12055	1725	230V/48W	

\* The maximum opening width is approx. 277 mm due to the sliding door.

\*\* The version "DT" has wing doors on the operator side instead of sliding doors.

Snack-Counter ECO 710 E OK-BE Serve-over version Height glass top 710 mm	Operator side is open	Operator side with wing doors or sliding doors	Width [mm]	Connection	
	angled	angled			
Snack-Counter ECO 710 E OK-BE - 1.5	12185	---	587	230V/21W	
Snack-Counter ECO 710 E OK-BE - DT 1.5	---	12186 **	587	230V/21W	
Snack-Counter ECO 710 E OK-BE - 2	12070	12056 *	750	230V/27W	
Snack-Counter ECO 710 E OK-BE - DT 2	---	12086 **	750	230V/27W	
Snack-Counter ECO 710 E OK-BE - 3	12071	12057	1075	230V/39W	
Snack-Counter ECO 710 E OK-BE - 4	12072	12058	1400	230V/54W	
Snack-Counter ECO 710 E OK-BE - 5	12073	12059	1725	230V/72W	

\* The maximum opening width is approx. 277 mm due to the sliding door.

\*\* The version "DT" has wing doors on the operator side instead of sliding doors.

#### Description

Illuminated built-in display case without cooling system. Serve-over version equipped with one or two intermediate levels. The customer side has an angled glass construction made of laminated safety glass. The front glass pane can be swung out for easy cleaning. The operator side is open or has wing doors (DT) or sliding doors. The height adjustable shelves are made of toughened safety glass and can be set at an angle, which means better presentation. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The mounting lip makes installation easy.

Commercial product for the installation in stationary food and service counter.

Version DT:

The operator side has wing doors.

Version with sliding doors:

The operator side has sliding doors, easily removable for cleaning (without bottom rail).

#### Special Accessories

Suction cup with handle (for easy opening of the front pane) 6244  
Option soft-close (soft-closing sliding doors) 4711

Price label rail glass shelf GN 1.5	11240
Price label rail glass shelf GN 2	11241
Price label rail glass shelf GN 3	11242
Price label rail glass shelf GN 4	11243
Price label rail glass shelf GN 5	11244
Price label rail lower display area OK GN 1.5	11485
Price label rail lower display area OK GN 2	11486
Price label rail lower display area OK GN 3	11487
Price label rail lower display area OK GN 4	11488
Price label rail lower display area OK GN 5	11489

Art.-No.