

6. Display Cases – refrigerated

for self-service



Snack-Counter KO-VT-LS-HS

Self-service version, open on customer side with recessed cooling pan, air curtain and sneeze guard

WiHA
Toughened Safety Glass
The front pane, side panes and glass shelves are made of toughened safety glass.

WiHA
LONG-LIFE
Longer operating life of the cooling unit.


WiHA
SPLIT-CONTROL
(Special Accessory)
Flat and removable control panel

WiHA
MOVE-DOWN
Patented

WiHA
MOVE-AWAY
Patented

WiHA
LED
energy-saving & low-maintenance

Preferred application:
For cooling exposed food in the self-service area.

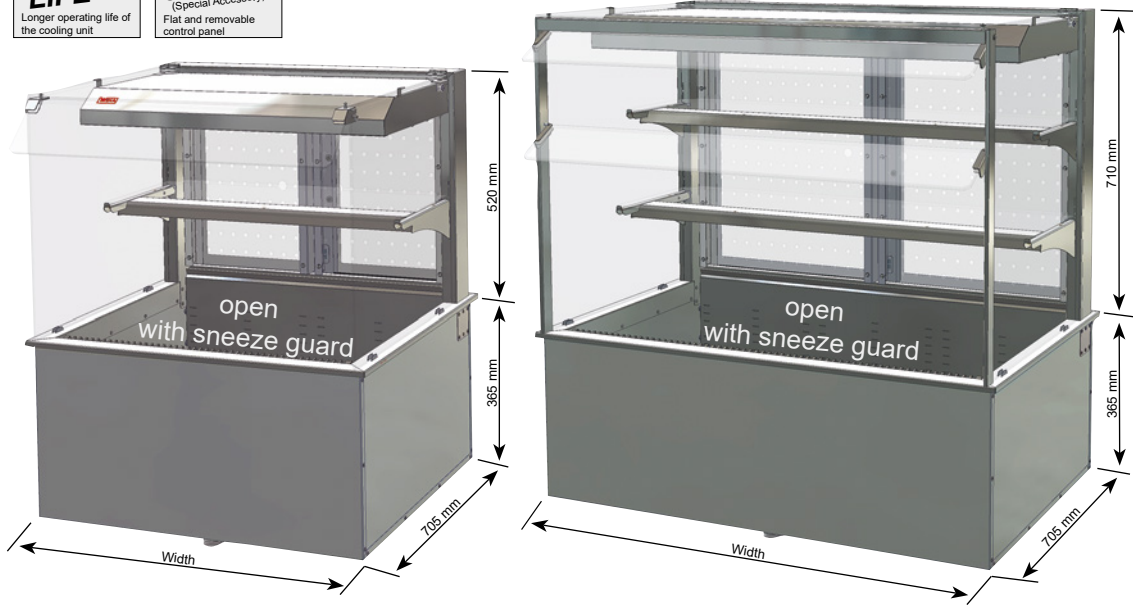

Also available with **bottle slide**, see special accessories.

Option: Light colour adjustable, see page 141.

Snack-Counter 520 E KO-VT-LS-HS	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Self-service version Height glass top 520 mm	angled	angled			
Snack-Counter 520 E KO-VT-LS-HS - DT 2	23796	23798	750	890 W	230V/940W
Snack-Counter 520 E KO-VT-LS-HS - DT 3	23797	23799	1075	950 W	230V/960W

The refrigerated display cases for external cooling units include an expansion valve for R452A and a temperature controller. Protective machine cover and condensate pan/drain trap are available as accessories.

The version "DT" has wing doors on the operator side.

Snack-Counter 710 E KO-VT-LS-HS	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Self-service version Height glass top 710 mm	angled	angled			
Snack-Counter 710 E KO-VT-LS-HS - DT 2	23591	23593	750	950 W	230V/950W
Snack-Counter 710 E KO-VT-LS-HS - DT 3	23592	23594	1075	1200 W	230V/1235W

The refrigerated display cases for external cooling units include an expansion valve for R452A and a temperature controller. Protective machine cover and condensate pan/drain trap are available as accessories.

The version "DT" has wing doors on the operator side.

Special Accessories

Condensate pan mounted under the cooling unit **Art.-No. 33196**
 Drain fitting 1 1/4" for connecting to the customer's drain **3815**
 Protective machine cover type 890-1200 **33195**
 Bearing rails for GN containers and shelves
 - Snack-Counter size per GN 1 (1 pair) **9880**
 Display shelf, unperforated; W=325 mm, GN 1 **6413**
 (Bearing rails must be ordered separately.)

Bottle slide Snack-Counter GN 2 incl. 10 divider bars **Art.-No. 26467**
 Bottle slide Snack-Counter GN 3 incl. 15 divider bars **26468**
 The bottle slide ensures the replacement of sold bottles and the customers view on a full assortment up to the last bottle.
 Divider bars for bottle slide 520, single **26457**

Suitable price label rails, see page 206.

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling unpackaged food.
 Open on the customer and with air curtain, sneeze guard and angled glass construction made of safety glass.
 The operator side has wing doors made of insulating glass.
 The glass shelves are height adjustable and can be set at an angle, which means better presentation.
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
 The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted.
 To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

Self-service version that is open on the customer side and with recessed cooling pan, air curtain and sneeze guard.

The operator side has wing doors made of insulating glass with transparent, perforated air distribution cover. To clean the gap the air distribution cover can be folded away. The side glass panes, the upper glass pane and the height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.
 A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

For external cooling unit

Delivery includes:





- Expansion valve for R452A; other refrigerants available on request
- Digital defrost and temperature controller

Cooling Unit Model

The powerful cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

Please note:

Make sure that there is good ventilation when installing on site!

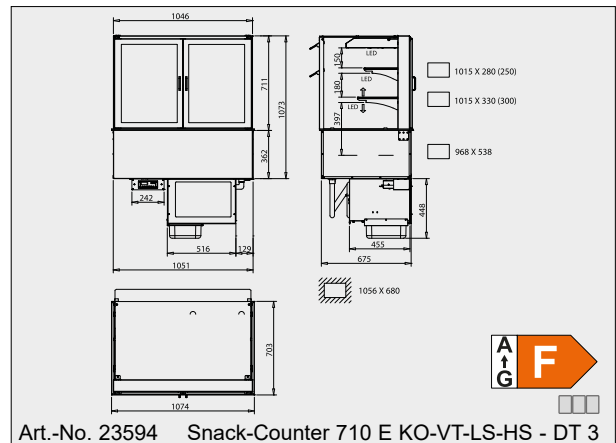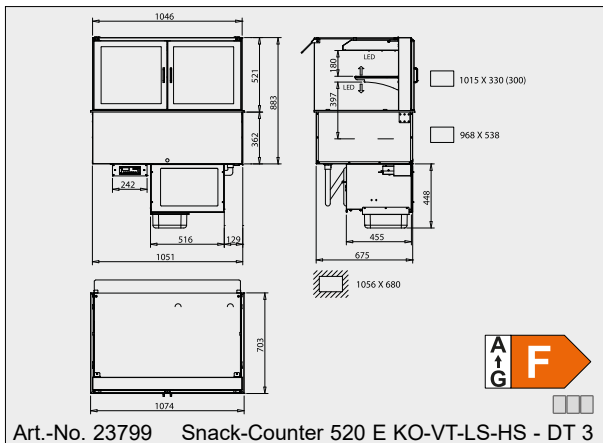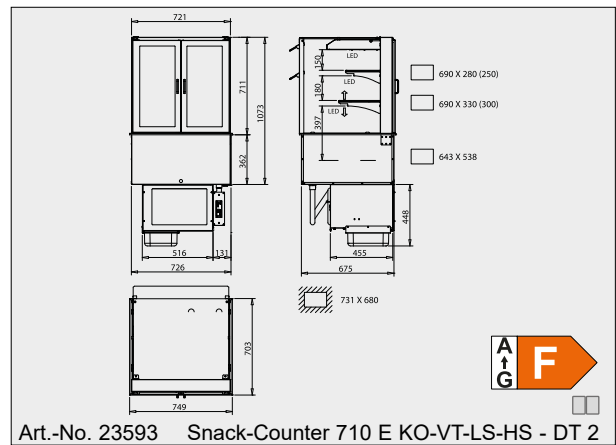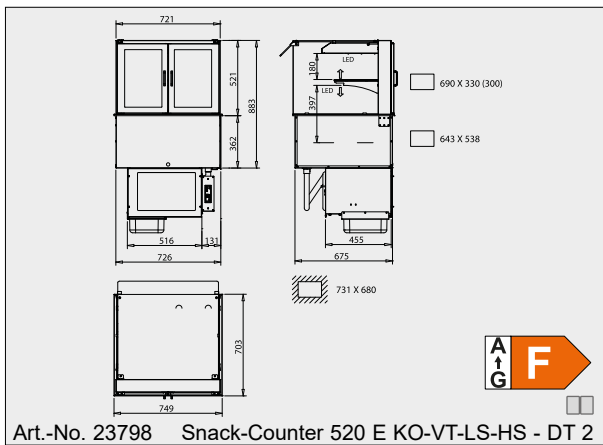

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".

