

6. Display Cases – refrigerated


for self-service



Snack-Counter SB-KST

Self-service version with sliding doors on the customer side

WiHA Freshness System (Special Accessory) Patented	WiHA LED energy-saving & low-maintenance
WiHA Toughened Safety Glass The front pane, side panes and glass shelves are made of toughened safety glass.	WiHA LONG-LIFE Longer operating life of the cooling unit
WiHA MOVE-DOWN Patented	WiHA SPLIT-CONTROL (Special Accessory) Flat and removable control panel
WiHA MOVE-AWAY Patented	WiHA Soft-Close Soft-closing sliding doors Special Accessory

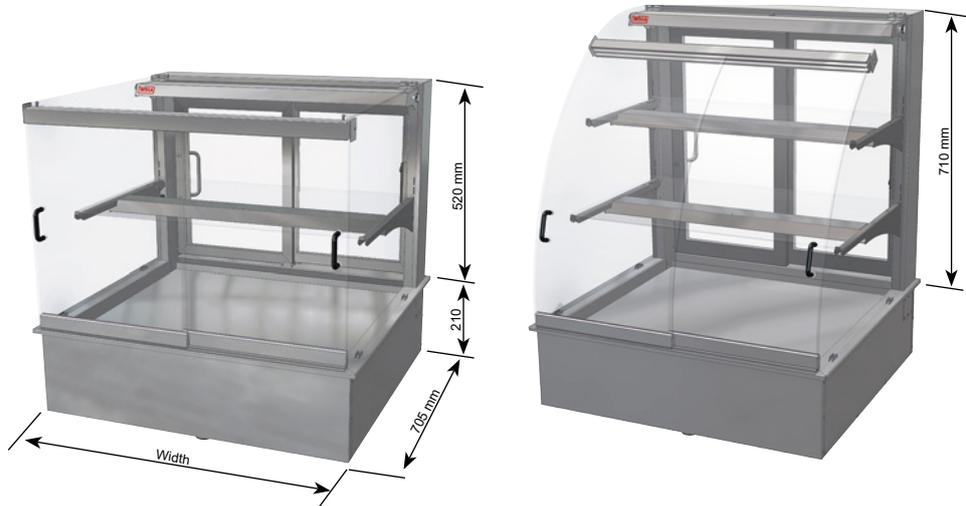

6
Self-Service Display Cases

Snack-Counter 520 SB-KST	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angled	slanted	round	angled	slanted			
Self-service version Height glass top 520 mm									
Snack-Counter 520 SB-KST - 2 */**	---	11830	11921	---	11834	11925	750	370 W	230V/325W
Snack-Counter 520 SB-KST - DT 2 *	---	11994	11986	---	11995	11987	750	370 W	230V/325W
Snack-Counter 520 SB-KST - 3	---	11831	11922	---	11835	11926	1075	370 W	230V/340W

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors.
* Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Snack-Counter 710 SB-KST	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angled	slanted	round	angled	slanted			
Self-service version Height glass top 710 mm									
Snack-Counter 710 SB-KST - 2 */**	11708	11838	11929	11712	11842	11933	750	370 W	230V/350W
Snack-Counter 710 SB-KST - DT 2 *	11992	11996	11988	11993	11997	11989	750	370 W	230V/350W
Snack-Counter 710 SB-KST - 3	11709	11839	11930	11713	11843	11934	1075	450 W	230V/380W

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors.
* Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

Special Accessories

	Art.-No.
Condensate pan mounted under the cooling unit	33266
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Protective machine cover type 370/450	8179
Air cooler for operation with refrigerant CO₂ (design see page 384)	10197
Wing doors on the operator side (DT), lockable	30005
Sliding door on the customer side (KST), lockable	10148
Sliding door on the operator side, lockable	10147
Option soft-close (soft-closing sliding doors)	4711

Patented **WIHA FRESHNESS SYSTEM** see page 126.
Suitable price label rails, see page 206.

Description

Refrigerated display case with circulating air for cooling cream cakes, cakes and snacks. The customer side has sliding doors and a rounded, angled or slanted glass construction made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has sliding doors made of safety glass.

The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version KST:

The customer side has sliding doors made of safety glass.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).





For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

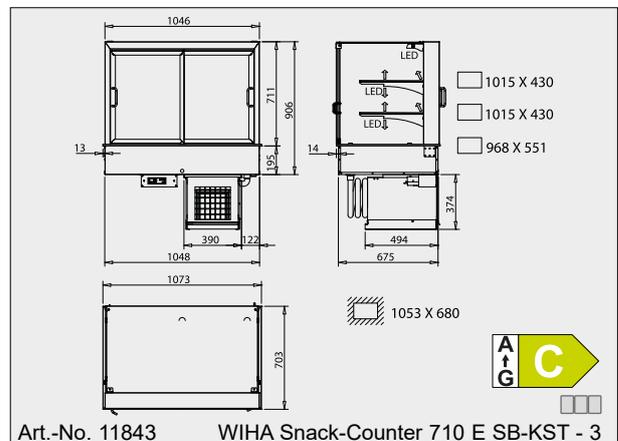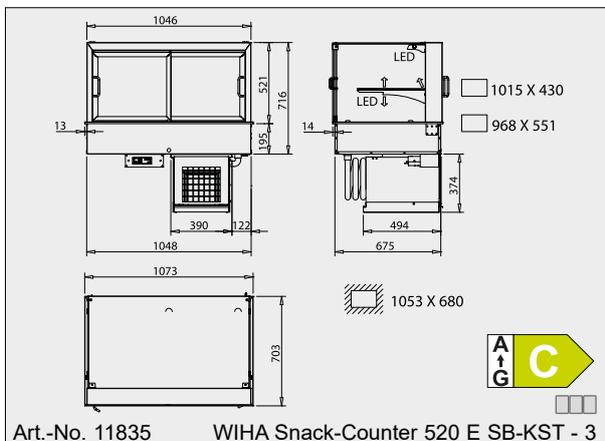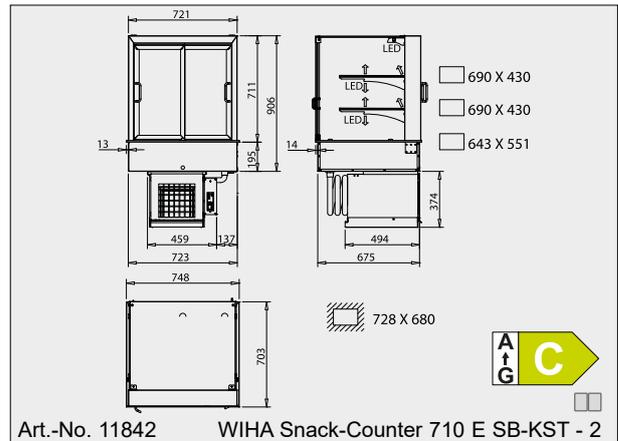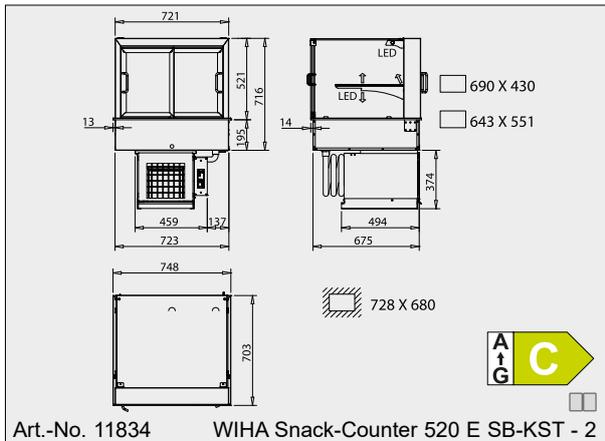

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".

