

6. Display Cases – refrigerated

for self-service



Snack-Counter SB


Self-service version with flaps made of safety glass

Preferred application:
For cooling exposed food in the self-service area.

WiHA Freshness System (Special Accessory) Patented	WiHA LED energy-saving & low-maintenance
WiHA Toughened Safety Glass The front pane, side panes and glass shelves are made of toughened safety glass.	WiHA LONG-LIFE Longer operating life of the cooling unit
WiHA MOVE-DOWN Patented	WiHA SPLIT-CONTROL (Special Accessory) Flat and removable control panel
WiHA MOVE-AWAY Patented	WiHA Soft-Close Soft-closing sliding doors Special Accessory

Option: Light colour adjustable, see page 141.

Base element UTB 51 optionally available, see table on page 386.

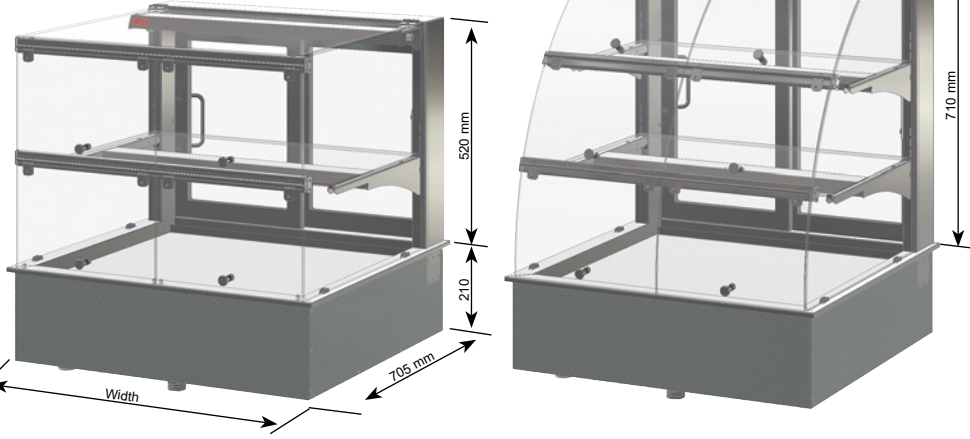

6
Self-Service Display Cases

Snack-Counter 520 SB Self-service version Height glass top 520 mm	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°E _T]	Connection
	round	angled	slanted	round	angled	slanted			
Snack-Counter 520 SB - DT 1.5 *	10254	10262	17024	10256	10264	17036	587	370 W	230V/325W
Snack-Counter 520 SB - 2 */**	9600	9650	17025	9630	9725	17037	750	370 W	230V/325W
Snack-Counter 520 SB - DT 2 *	9967	9975	17026	9968	9976	17038	750	370 W	230V/325W
Snack-Counter 520 SB - 3	9601	9651	17027	9631	9726	17039	1075	370 W	230V/340W
Snack-Counter 520 SB - 4	9602	9652	17028	9632	9727	17040	1400	450 W	230V/400W
Snack-Counter 520 SB - 5	9603	9653	17029	9633	9728	17041	1725	605 W	230V/530W

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Snack-Counter 710 SB Self-service version Height glass top 710 mm	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°E _T]	Connection
	round	angled	slanted	round	angled	slanted			
Snack-Counter 710 SB - DT 1.5 *	10255	10263	17030	10257	10265	17042	587	370 W	230V/325W
Snack-Counter 710 SB - 2 */**	9610	9766	17031	9646	9770	17043	750	370 W	230V/350W
Snack-Counter 710 SB - DT 2 *	9971	9979	17032	9972	10013	17044	750	370 W	230V/350W
Snack-Counter 710 SB - 3	9611	9767	17033	9647	9771	17045	1075	450 W	230V/380W
Snack-Counter 710 SB - 4	9612	9768	17034	9648	9772	17046	1400	605 W	230V/540W
Snack-Counter 710 SB - 5	9613	9769	17035	9649	9773	17047	1725	825 W	230V/715W

The FRESHNESS SYSTEM (circulated air disinfection), protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Not available with FRESHNESS SYSTEM. ** Max. opening width of the sliding door approx. 277 mm.

Special Accessories

	Art.-No.
Condensate pan mounted under the cooling unit	33266
Drain fitting 1 1/4" for connection to the customer's drain	3815
Protective machine cover type 370/450	8179
Protective machine cover type 605	8180
Protective machine cover type 825/980	8181
Air cooler for operation with refrigerant CO ₂ (design see page 384)	10197
Sliding door lockable	10147
Option soft-close (soft-closing sliding doors)	4711

Patented WIHA FRESHNESS SYSTEM see page 126.
Suitable price label rails, see page 206.



Description

Refrigerated display case with circulating air for cooling cakes and snacks. On the customer side with self-service flaps and rounded, angled or slanted glass construction made of safety glass. The glass shelves can be set at an angle, which means better presentation. Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has self-service flaps (self-closing) made of safety glass. The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves

are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. The shelves can be set at an angle, which means better presentation. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m). **With WIHA-LONG-LIFE for a longer operating life of the cooling unit.**







Version DT:
The operator side has wing doors made of insulating glass.

Otherwise:
The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit
Delivery includes:
- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

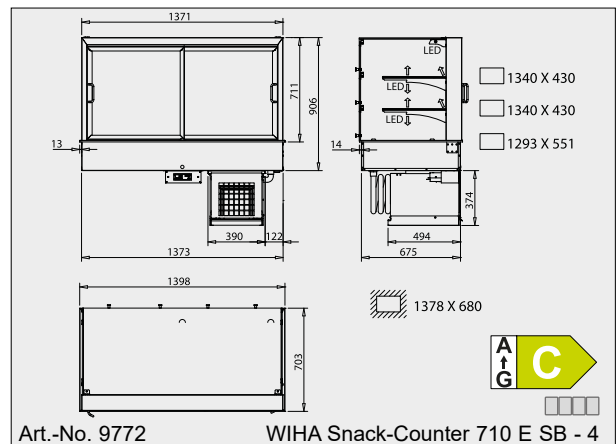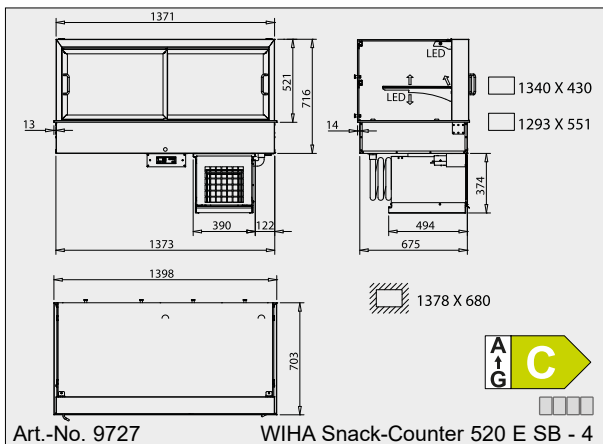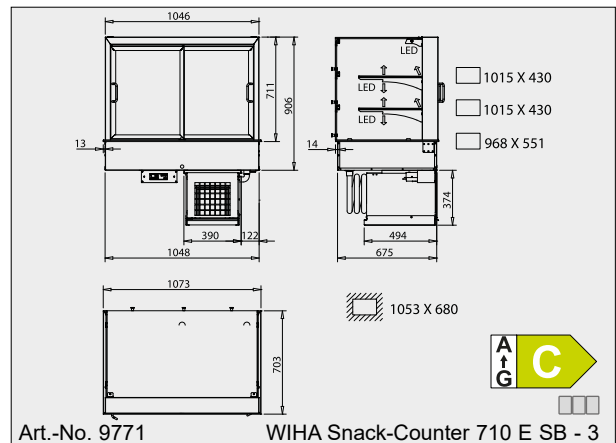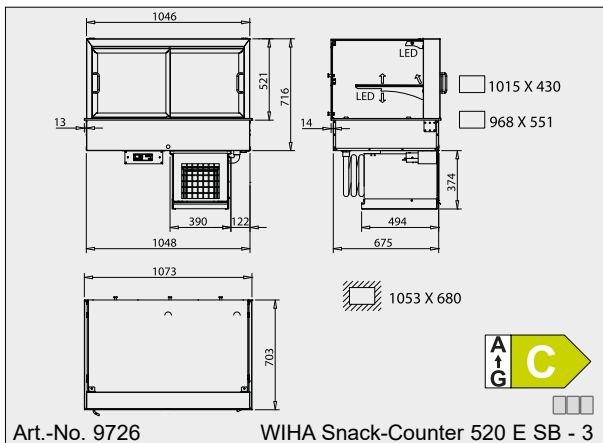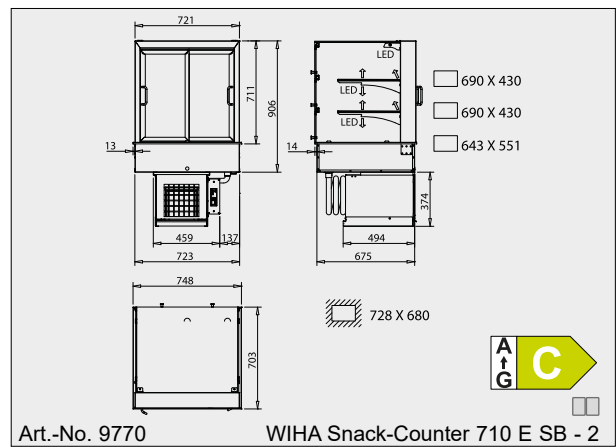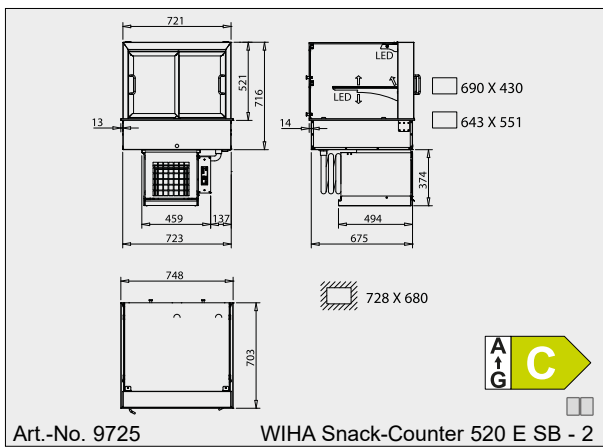

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".