

6. Display Cases – refrigerated

for self-service



Snack-Counter ECO E SB-KST-VT

Energy-saving display case with circulating air and sliding doors on the customer side, deepened cooling pan, **lateral insulating glazing and LED lighting**

WiHA + ECO ecologically friendly	WiHA LED energy-saving & low-maintenance
WiHA Toughened Safety Glass <small>The front pane, side panes and glass shelves are made of toughened safety glass.</small>	WiHA LONG-LIFE <small>Longer operating life of the cooling unit</small>
WiHA MOVE-DOWN <small>Patented</small>	WiHA SPLIT CONTROL <small>Flat and removable control element</small>
WiHA MOVE-AWAY <small>Patented</small>	



NEW!

Also available with **bottle slide**,
see special accessories.



Snack-Counter ECO 520 E SB-KST-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	WiHA + ECO ecologically friendly
Self-service version Height glass top 520 mm						Energy-consumption
Snack-Counter ECO 520 E SB-KST-VT - 2 *	12160	12161	750	370 W	230V/325W	3,6 kW/24h
Snack-Counter ECO 520 E SB-KST-VT - DT 2	12163	12164	750	370 W	230V/325W	3,6 kW/24h
Snack-Counter ECO 520 E SB-KST-VT - 3	12165	12166	1075	370 W	230V/340W	3,8 kW/24h

Protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the service side instead of sliding doors.

* Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO 710 E SB-KST-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	WiHA + ECO ecologically friendly
Self-service version Height glass top 710 mm						Energy-consumption
Snack-Counter ECO 710 E SB-KST-VT - 2 *	12167	12168	750	370 W	230V/330W	3,7 kW/24h
Snack-Counter ECO 710 E SB-KST-VT - DT 2	12169	12187	750	370 W	230V/330W	3,7 kW/24h
Snack-Counter ECO 710 E SB-KST-VT - 3	12188	12189	1075	450 W	230V/340W	4,5 kW/24h

Protective machine cover and condensate pan/drain trap are available as accessories. The version „DT“ has wing doors on the service side instead of sliding doors.

* Max. opening width of the sliding door approx. 277 mm.

Special Accessories

Condensate pan mounted under the cooling unit

Drain fitting 1 1/4" for connecting to the customer's drain

Art.-No.

2680

Protective machine cover for type 370/450

3815

Wing doors on the service side (DT), lockable

8179

Sliding door on the customer side (KST), lockable

30005

Sliding door on the service side, lockable

10148

Option soft-close (softly closing sliding doors)

4711

for the service side

Bearing rails for GN containers, shelves and bottle slide:

Snack-Counter size per GN 1 (1 pair) **9880**

Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 204.

Display shelf, unperforated; width=325 mm, GN 1

(Bearing rails must be ordered separately.)

Suitable price label rails see page 204.

6413

Art.-No.

26467

Bottle slide Snack-Counter GN 2 incl. 10 divider bars GN

26468

Bottle slide Snack-Counter GN 3 incl. 15 divider bars GN

The bottle slide ensures the replacement of sold bottles and the customers view on a full assortment up to the last bottle.

Divider bars for bottle slide 520, single

26457




NEW! Option: Light colour adjustable, see page 137.

Description

Energy-saving refrigerated display case with circulating air and deepened cooling pan and sliding doors on the customer side for self-service. The sliding doors on the customer side are equipped with soft-close function (softly closing sliding doors). Display case with lateral insulating glazing for cooling cakes, cream cakes and snacks. ECO-PLUS version with reduced energy consumption. On the customer side, lateral and on top with insulating glazing made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Deepened inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet metal. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–150 mm deep) can be mounted or display shelves (available as accessories) can be inserted. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. To clean the surfaces of the evaporator, it can be folded down (MOVE-DOWN TECHNOLOGY) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY TECHNOLOGY).

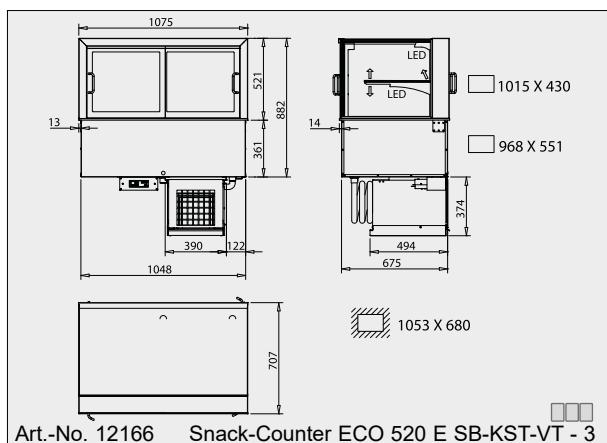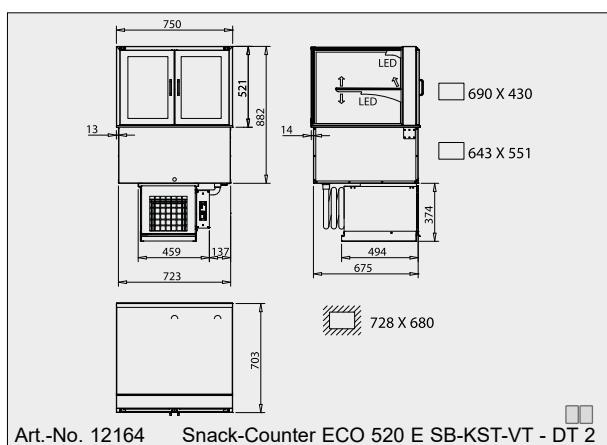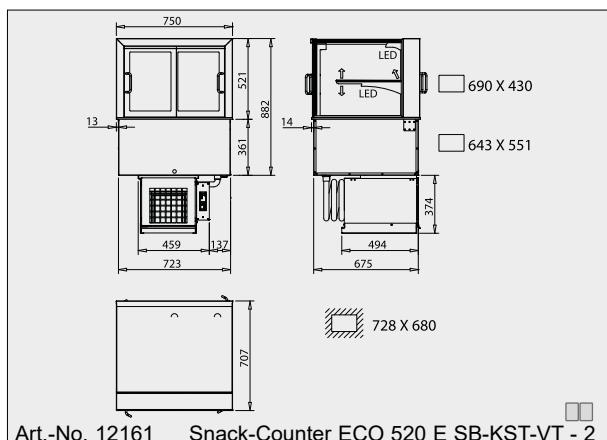

On the customer side with sliding doors for self-service with soft-close function (softly closing sliding doors). The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a shielded LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different food. The flat control element (installation depth: approx. 20 mm) can be removed for mounting in the panel front (cable length: approx. 1 m).

With WiHA-LONG-LIFE for a longer operating life of the cooling unit.

Version KST:

On the customer side with sliding doors made of insulating glass.

Version DT:

On the service side with wing doors made of insulating glass.

Otherwise:

On the service side with sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).




For external cooling unit

Delivery includes:

- Expansion valve for R134a / R513A
- Digital defrost and temperature controller

Cooling Unit Model

The powerful cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. Delivery includes a protective machine cover.

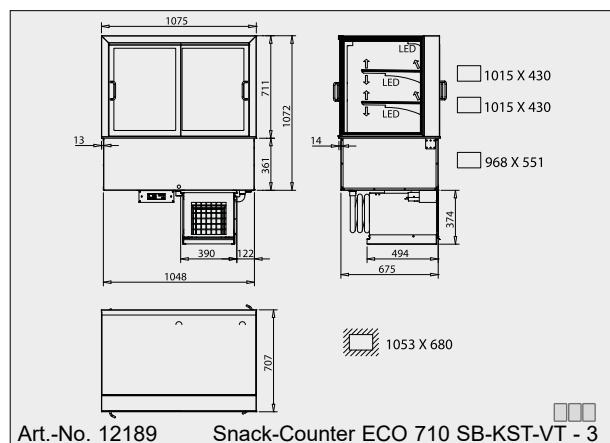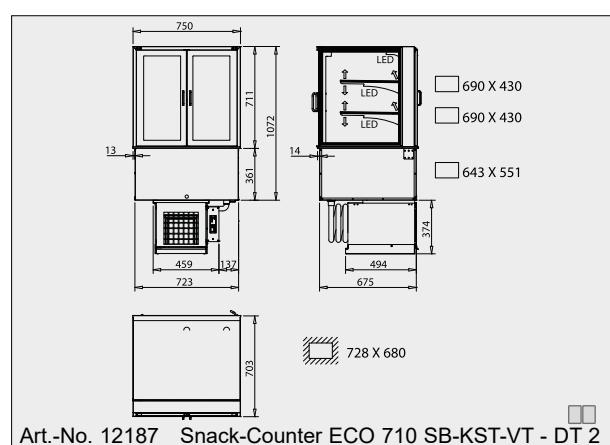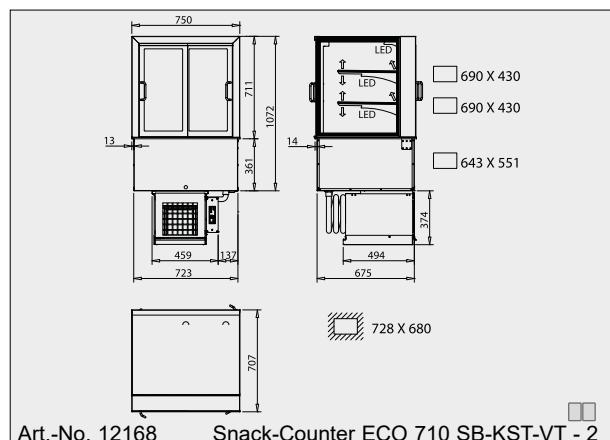

6

Self-Service
Display Cases

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".