

# 1. Air Chiller Units

straight installation



1

Straight  
Installation

## Snack-Genie®

The low-priced no-frost refrigerator for cakes and snacks



Protective machine cover and condensate pan are available as an accessory.

### Reliable technology for the commercial operation

- Longer operating life of the cooling unit (LONG-LIFE)
- 2 air speeds
- Liftable evaporator
- Service friendly (MOVE-DOWN and MOVE-AWAY technology)
- Robust digital temperature and defrost controller
- Cooling unit with power reserve


**Preferred application:**  
Cakes, tartes and snacks with a merchandise height of up to max. 6 cm.

WIHA Snack-Genie	For external cooling unit	With cooling unit and controller	Cooling power [-10°ET]	Connection cooling unit	
Model	Art.-No.	Art.-No.			
Snack-Genie 600	10156	20261	370 W	230V/270W	■
Snack-Genie 800	6120	20262	450 W	230V/350W	■
Snack-Genie 1200	6121	20263	605 W	230V/390W	■
Snack-Genie 1600	6122	20264	825 W	230V/540W	■

The refrigeration units for external cooling units include an expansion valve for R134a/R513A and built-in temperature sensors. Protective machine cover and condensate pan/drain trap are available as accessories.

### Special Accessories

	Art.-No.
Condensate pan mounted under the cooling unit	33196
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Reference thermometer for the customer side TPE 2	2182
Machine housing, tiltable	2678
TMP 620 controller for external cooling unit	12201
TMP 630 instead of TMP 620 controller with 2 freely usable outputs	12210
Protective machine cover type 370-825	6253

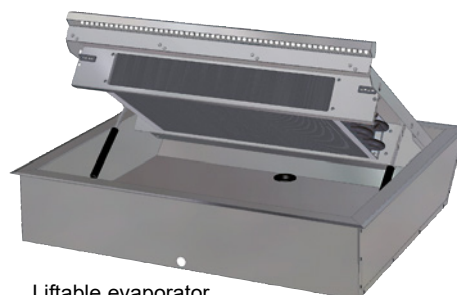

Liftable evaporator for easy cleaning of the pan bottom.



## Description

Chiller unit with circulating air for cooling cakes and snacks with a merchandise height of up to 6 cm.

To operate it, the customer should provide a glass top that should only be open on the air blow-off side.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Commercial product for the installation in stationary food and service counter.

## Design

Interior pan made entirely of stainless steel, material 1.4301, with flush threaded drain fitting (1 1/4"). Pressure-injected expanded polyurethane insulation (CFC-free). The exterior is made of galvanised sheet steel. Inside the pan is a circulating air evaporator and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel, material 1.4301.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs.

The evaporator and fan area are easily accessible for servicing. After the front retaining bolts have been released, the entire merchandise display can be swung away from the evaporator, making the fan area and evaporator readily accessible. The mounting lip makes installation easy.

For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Built-in temperature sensor and defrost sensor

## Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.





The TMP 620 digital defrost and temperature controller is mounted right next to the cooling unit. Two air speeds can be selected for different food. A freely usable output can be used for counter lighting.

**With WIHA-LONG-LIFE for a longer operating life of the cooling unit.**

**1**  
Straight  
Installation



The entire interior area is easily accessible for servicing.

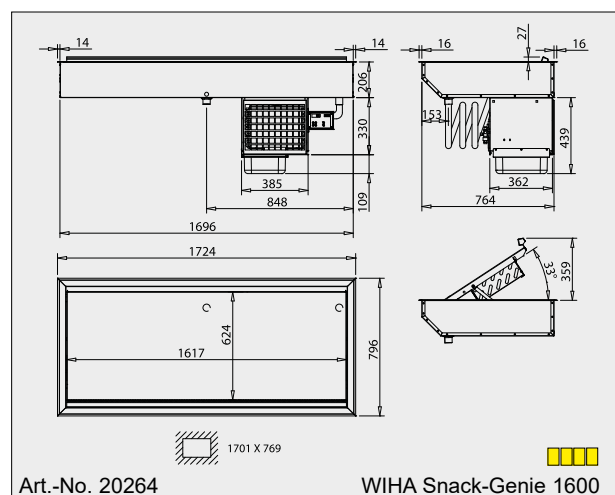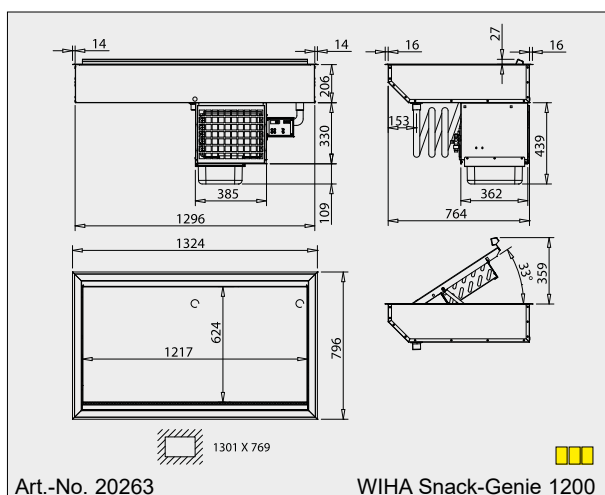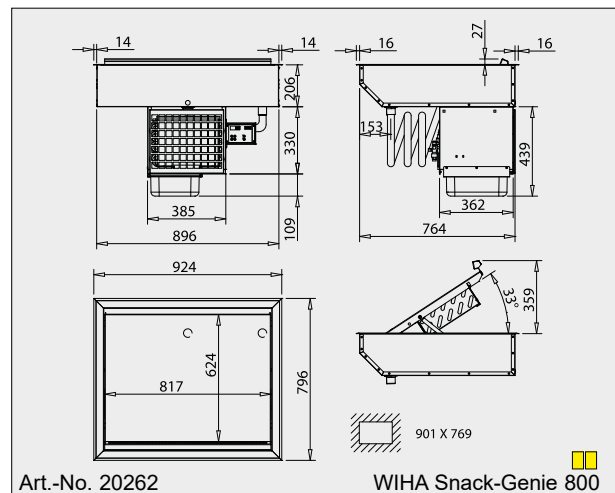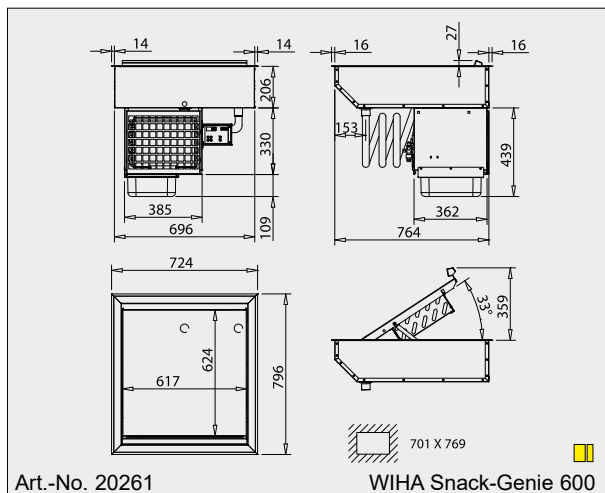

The drawings are shown with special accessory that is not included; more drawings are available on [www.wiha-web.com](http://www.wiha-web.com) under "Info Centre / Customer Area".